


仓储料斗输送带：卸料高度监测

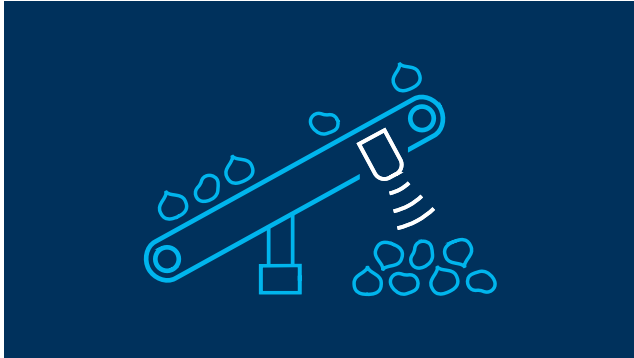

通过输送带进入料仓的作物需避免过高卸料。cube 超声波传感器或pico+ 超声波传感器持续测量至卸料堆的距离，并将该值保持恒定。控制系统根据距离数据调节输送带高度，确保敏感作物始终低高度卸料，避免损伤。

应用领域

=农业机械

物流解决方案

该应用领域的传感器



cube

housing: cubic

detection ranges: 350 mm, 1,300 mm, and 3,400 mm

outputs: 1x Push-Pull, 1x Push-Pull + 1x analog - switchable to a second Push-Pull switching output



pico+

housing: M18 all-metal sleeve

detection ranges: 250 mm, 350 mm, 600 mm and 1,300 mm

outputs: 1x Push-Pull, 4-20 mA and 0-10 V

special feature: 90° angular head