



Product description

The sks sensor offers a non-contact measurement of the distance to an object which must be positioned within the sensor's detection zone. The switching output is set in dependence of the adjusted detect distance.

Via the push-button, the detect distance and operating mode can be adjusted (Teach-in). Two LEDs indicate operation and the state of the switching output.

The output function is changeable from NOC to NCC.

Safety Notes

- Read the operating manual prior to start-up.
- Connection, installation and adjustment works may only be carried out by expert personnel.
- No safety component in accordance with the EU Machine Directive.


Proper use

sks ultrasonic sensors are used for non-contact detection of objects.


Installation

- Mount the sensor at the installation site.
Maximum torque: 0,5 Nm
- Connect a connection cable to the M8 device plug, see figure 1.

3-pin initiator plug



4-pin initiator plug



*Do not connect

Fig. 1: Pin assignment with view onto sensor plug and colour coding of the microsonic connection cable

Start-Up

- Connect the power supply.
- Set the parameters of the sensor using the Teach-in procedure, see diagram »Set sensor parameters with the Teach-in procedure«.

Factory Setting

sks sensors are delivered factory made with the following settings:

- Operation with one switching point
- Switching output on NOC
- Switching point at operating range

Operating modes

Three operating modes are available for the switching output:

- Operation with one switching point

The switching output is set if the object falls below the set switching point.

Window mode

The switching output is set if the object is outside the set window limits.

Two-way reflective barrier

The switching output is set if the object is between sensor and reflector.

Checking operation mode

- In normal operating mode shortly press the push-button.

The green LED stops shining for one second, then it will show the current operation mode:

- 1 x flashing = operation with one switching point
- 2 x flashing = window mode
- 3 x flashing = reflective barrier

After a break of 3 s the green LED shows the output function:

- 1 x flashing = NOC
- 2 x flashing = NCC

Maintenance

microsonic sensors are maintenance-free. In case of excess caked-on dirt we recommend cleaning the white sensor surface


Notes

- sks-15/CD and sks-15/CE sensors have internal temperature compensation. Because the sensors heat up on their own, the temperature compensation reaches its optimum working point after approximately 30 minutes of operation. The sensors sks-15/D and sks-15/E have no temperature compensation.
- The sks sensor has a blind zone, within which distance measurements are not possible.
- In the normal operating mode, an illuminated yellow LED signals the switching output is switched through.
- If the object to be sensed moves into the detection area from the side, the switching distance should be set 8-10 % further than the desired switch point to obtain a reliable object detection. If the object moves towards the sensor (e.g. level control) the switching point




Operating manual

Ultrasonic proximity switch with one switching output

- sks-15/D sks-15/E
- sks-15/CD sks-15/CE

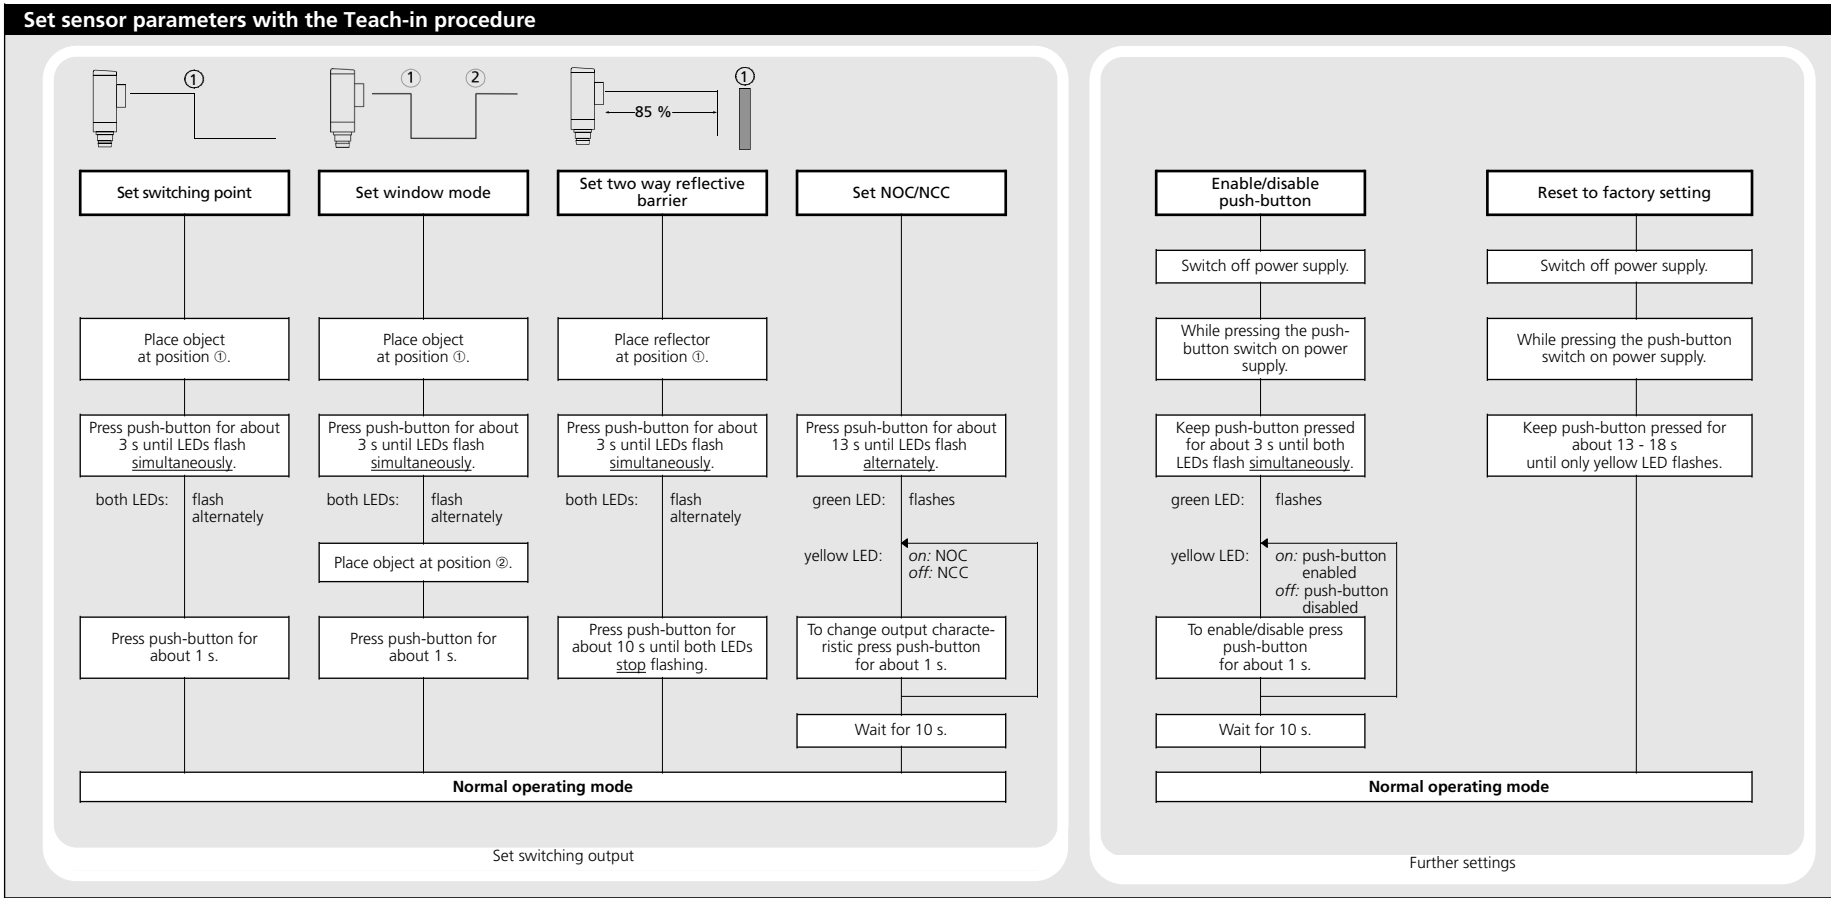

Technical data



blind zone	20 mm	20 mm
operating range	150 mm	150 mm
maximum range	250 mm	250 mm
angle of beam spread	See detection zone	See detection zone
transducer frequency	380 kHz	380 kHz
resolution	0.10 mm	0.10 mm
reproducibility	± 0.15 %	± 0.15 %
detection zones for different objects:		
accuracy	Temperature drift 0.17 % / °C	± 1% (Temperature drift internal compensated)
operating voltage UB	20 - 30 V DC, reverse polarity protection	20 - 30 V DC, reverse polarity protection
voltage ripple	±10 %	±10 %
no-load current consumption	< 25 mA	< 25 mA
housing	ABS	ABS
class of protection to EN 60529	IP 67	IP 67
norm conformity	EN 60947-5-2	EN 60947-5-2
type of connection	3-pin M8 initiator plug	4-pin M8 initiator plug
controls	push-button	push-button
scope of settings	Teach-in via push-button	Teach-in via push-button
indicators	LED green (operation) LED yellow (state of output)	LED green (operation) LED yellow (state of output)
operating temperature	-25°C to +70°C	-25°C to +70°C
storage temperature	-40°C to +85°C	-40°C to +85°C
weight	8 g	8 g
switching hysteresis	2 mm	2 mm
switching frequency	25 Hz	25 Hz
response time	32 ms	32 ms
time delay before availability	< 300 ms	< 300 ms
order no.	sks-15/D	sks-15/CD
switching output	pnp, UB+2 V, I _{max} = 200 mA switchable NOC/NCC, short-circuit-proof	pnp, UB+2 V, I _{max} = 200 mA switchable NOC/NCC, short-circuit-proof
order no.	sks-15/E	sks-15/CE
switching output	npn, -UB+2 V, I _{max} = 200 mA switchable NOC/NCC, short-circuit-proof	npn, -UB+2 V, I _{max} = 200 mA switchable NOC/NCC, short-circuit-proof

can be taught to the actual distance at which the sensor has to switch the output.




Fig. 2: Set the switching point for different directions of movement of the object

- In the »Two-way reflective barrier« operating mode, the object has to be within the range of 0-85 % of the set distance.
- If the push-button is not pressed for 30 seconds during the Teach-in setting, the settings made hitherto are deleted.
- The sensor can be reset to its factory setting.



2014/30/EU

