



### Product description

- The mic+ sensor with one analogue output measures the distance to an object within the detection zone contactless. A signal proportional to distance is created according to the adjusted window limits of the analogue characteristic curve.
- The sensor automatically detects the load put to the analogue output and switches to current output or voltage output respectively.
- All settings are done with two push-buttons and a three-digit LED display (TouchControl).
- Three-colour LEDs indicate all operation conditions.
- Choosing between rising and falling output characteristic is possible.
- The sensors are adjustable manually via TouchControl or via Teach-in procedure.

- Useful additional functions are set in the Add-on menu.
- Using the LinkControl adapter (optional accessory) and the LinkControl software for Windows®, all Teach-in and additional sensor parameter settings can be optionally undertaken.


The mic+ sensors have a blind zone in which distance measurement is not possible. The operating range indicates the distance of the sensor that can be applied with normal reflectors with sufficient function reserve. When using good reflectors, such as a calm water surface, the sensor can also be used up to its maximum range. Objects that strongly absorb (e.g. plastic foam) or diffusely reflect sound (e.g. pebble stones) can also reduce the defined operating range.

### Operating Manual

#### mic+ Ultrasonic Sensors with one analogue output

- mic+25/IU/TC
- mic+35/IU/TC
- mic+130/IU/TC
- mic+340/IU/TC
- mic+600/IU/TC

Diagram 1: Set sensor parameters numerically using LED display

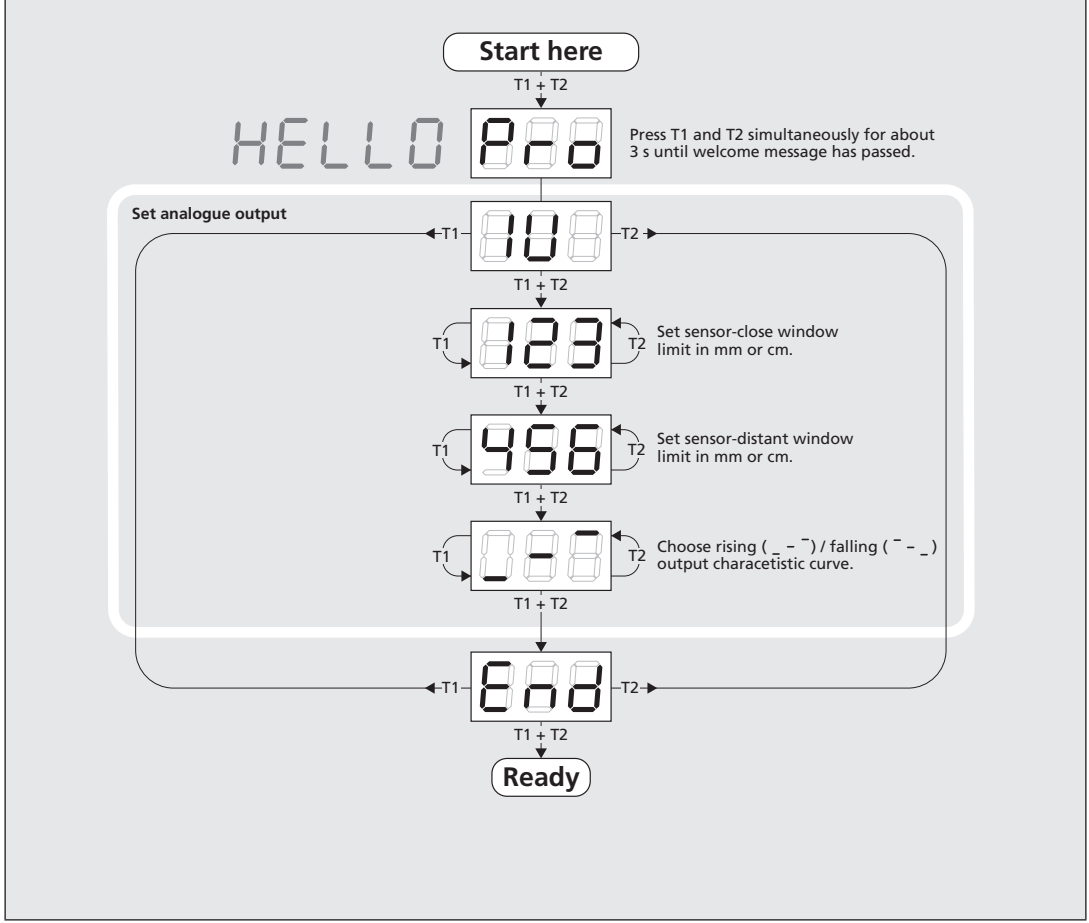

### Safety Notes

- Read the operating instructions prior to start-up.
- Connection, installation and adjustment works may only be carried out by expert personnel.
- No safety component in accordance with the EU Machine Directive, use in the area of personal and machine protection not permitted

### Proper Use

mic+ ultrasonic sensors are used for non-contact detection of objects.

### Synchronisation

If the assembly distances shown in Fig. 1 for two or more sensors are exceeded the integrated synchronisation should be used. Connect Sync/Com-channels (pin 5 at the units receptable) of all sensors (10 maximum).

	D	D ↔ D
mic+25...	≥0.35 m	≥2.50 m
mic+35...	≥0.40 m	≥2.50 m
mic+130...	≥1.10 m	≥8.00 m
mic+340...	≥2.00 m	≥18.00 m
mic+600...	≥4.00 m	≥30.00 m

Fig. 1: Assembly distances, indicating synchronisation/multiplex

### Multiplex mode

The Add-on-menu allows to assign an individual address »01« to »10« to each sensor connected via the Sync/Com-channel (Pin5). The sensors perform the ultrasonic measurement sequentially from low to high address. Therefore any influence between the sensors is rejected. The address »00« is reserved to synchronisation mode and deactivates the multiplex mode. To use synchronised mode all sensors must be set to address »00«.

### Installation

- Assemble the sensor at the installation location.
- Plug in the connector cable to the M12 connector, see Fig. 2.




Fig. 2: Pin assignment with view onto sensor plug and colour coding of the microsonic connection cable

### Start-up

- Connect the power supply.
- Set the parameters of the sensor manually via TouchControl (see Fig. 3 and Diagram 1)
- or use the Teach-in procedure to adjust the detect points (see Diagram 2).




Fig. 3: TouchControl LED display

### Factory setting

- mic+ sensors are delivered factory made with the following settings:
- Rising analogue characteristic
- Window limits for the analogue output set to blind zone and operating range
- Measurement range set to maximum range

### Maintenance

mic+ sensors work maintenance free. Small amounts of dirt on the surface do not influence function. Thick layers of dirt and caked-on dirt affect sensor function and therefore must be removed.

### Notes

- mic+ sensors have internal temperature compensation. Because the sensors heat up on their own, the temperature compensation reaches its optimum working point after approx. 30 minutes of operation.
  - If an object is within the set window limits of the analogue output, then LED D1 lights up green, if the object is outside the window limits, then LED D1 lights up red.
  - The load put to the analogue output is detected automatically when turning supply voltage on.
  - During normal operating mode, the measured distance value is displayed on the LED-indicator in mm (up to 999 mm) or cm (from 100 cm). Scale switches automatically and is indicated by a point on top of the digits. Alternatively a percentage scale may be set in the add-on menu. In this connection 0 % and 100 % correspond to the set window limits of the analogue output.
  - If no objects are placed within the detection zone the LED-indicator shows »- - -«.
  - The sensor can be set to its factory setting, see Diagram 3.
  - If no push-buttons are pressed for 20 seconds during parameter setting mode the made changes are stored and the sensor returns to normal operating mode.
- Show parameters**
- In normal operating mode shortly push T1. The LED display shows »PA.«
- Each time you tap push-button T1 the actual settings of the analogue output are shown.

Diagram 2: Set sensor parameters via Teach-in procedure

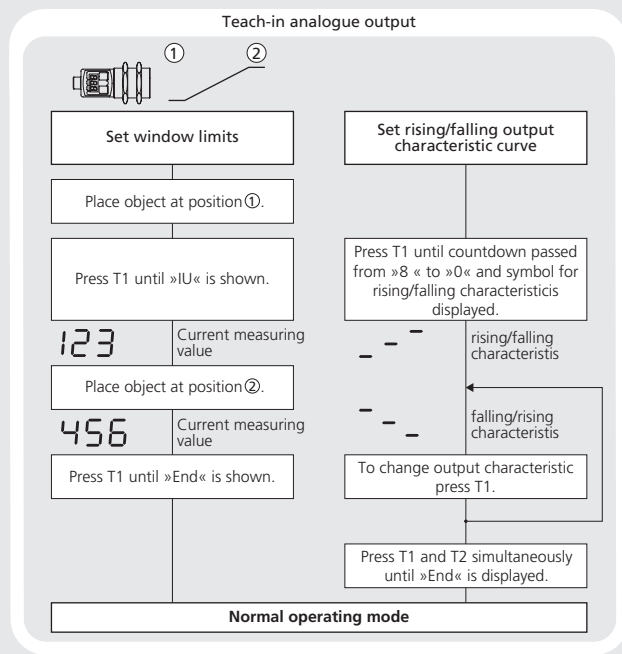


Diagram 3: Key lock and factory setting



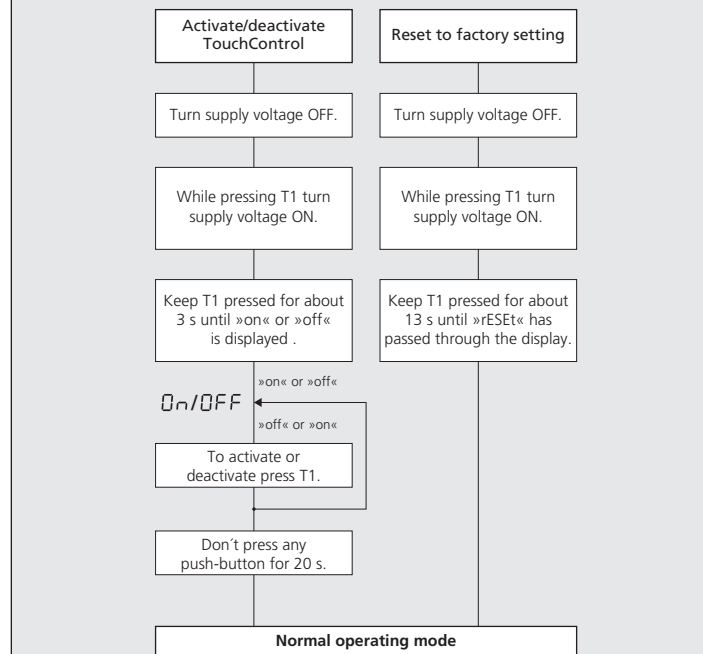



Diagram 4: Useful additional functions in Add-on menu (for experienced users only, settings not required for standard applications)

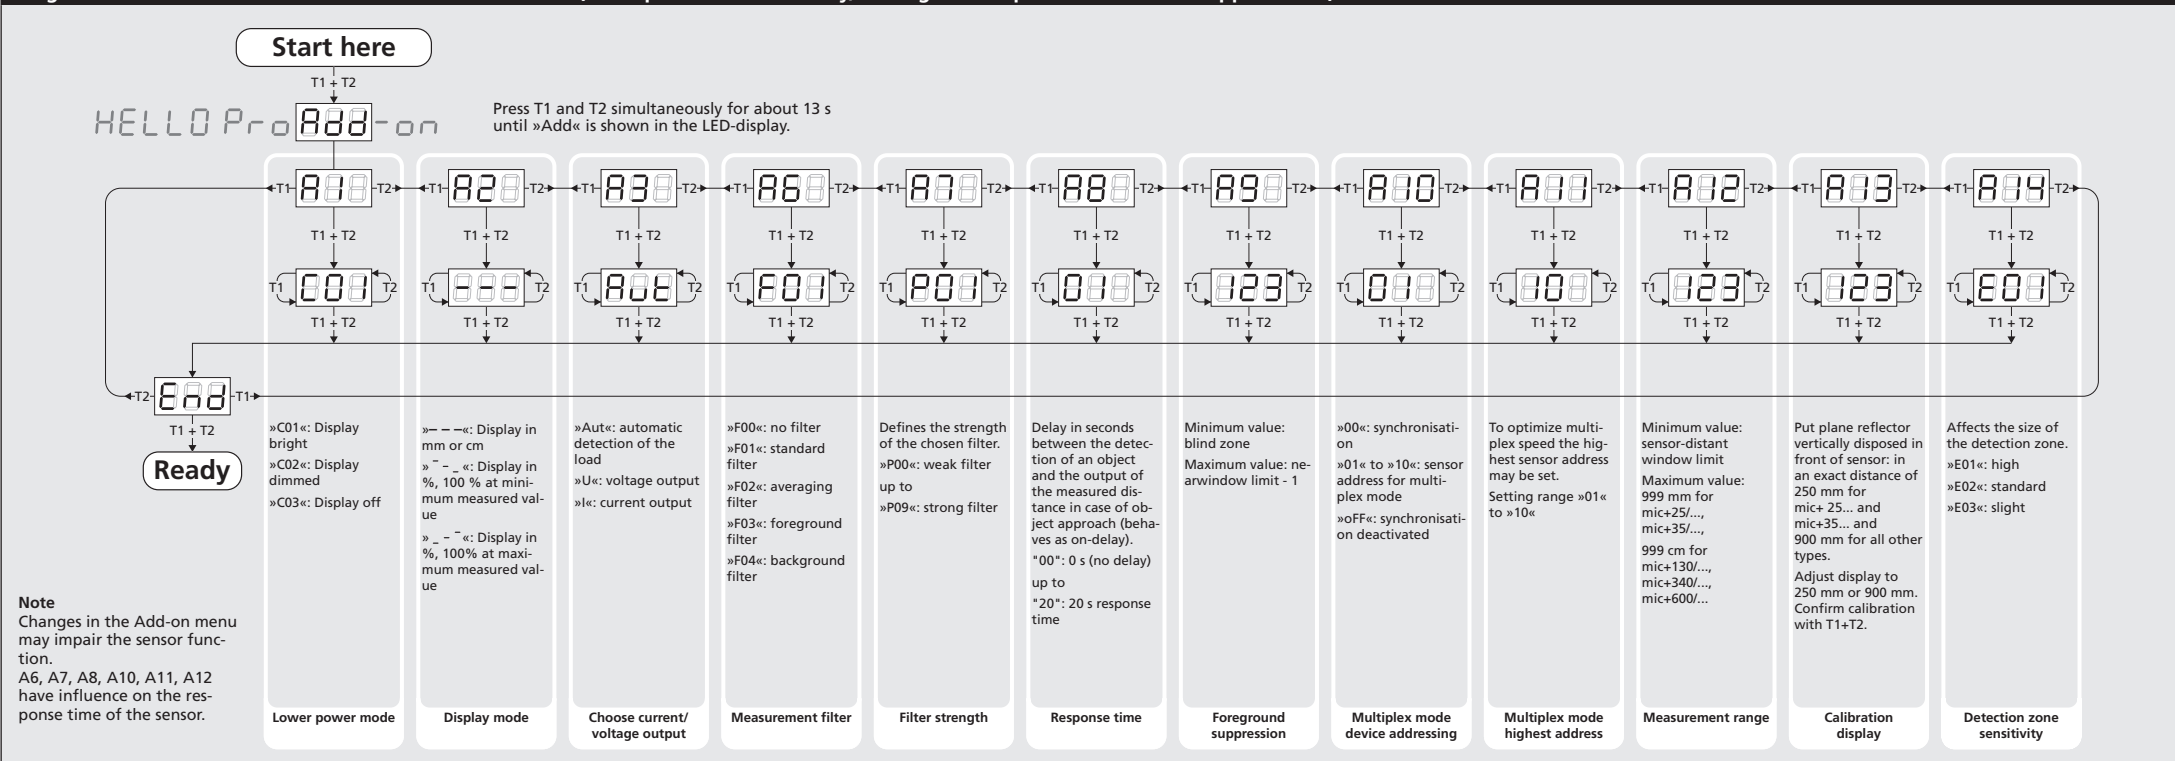


**Technical data**




**mic+25... D**




**mic+35... D**




**mic+130... D**



**mic+340... D**








**mic+600... D**



<b>blind zone</b>	0 to 30 mm	0 bis 65 mm	0 to 200 mm	0 to 350 mm	0 to 600 mm
<b>operating range</b>	250 mm	350 mm	1,300 mm	3,400 mm	6,000 mm
<b>maximum range</b>	350 mm	600 mm	2,000 mm	5,000 mm	8,000 mm
<b>angle of beam spread</b>	see detection zone	see detection zone	see detection zone	see detection zone	see detection zone
<b>transducer frequency</b>	320 kHz	400 kHz	200 kHz	120 kHz	80 kHz
<b>resolution</b>	0.025 to 0.10 mm, depending on the window limits	0.025 to 0.17 mm, depending on the window limits	0.18 to 0.57 mm, depending on the window limits	0.18 to 1.5 mm, depending on the window limits	0.18 to 2.4 mm, depending on the window limits

**detection zones**  
for different objects:  
The dark grey areas represent the zone where it is easy to recognise the normal reflector (round bar). This indicates the typical operating range of the sensors. The light grey areas represent the zone where a very large reflector – for instance a plate – can still be recognised. The requirement here is for an optimum alignment to the sensor. It is not possible to evaluate ultrasonic reflections outside this area.

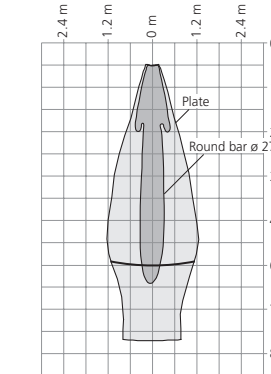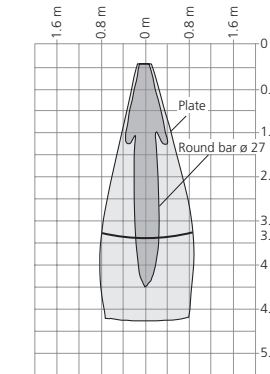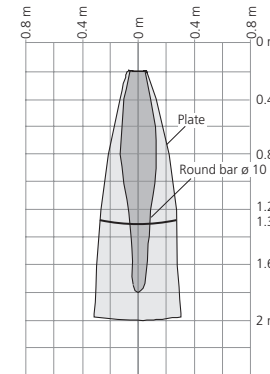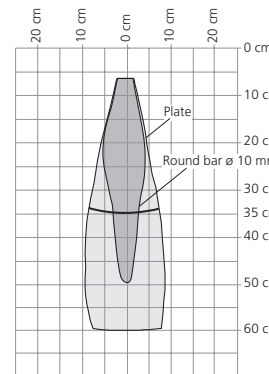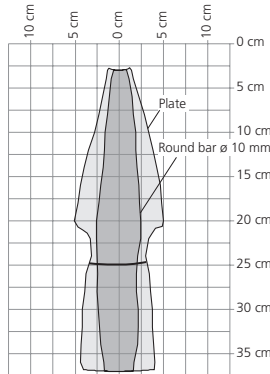

<b>reproducibility</b>	±0.15 %	±0.15 %	±0.15 %	±0.15 %	±0.15 %
<b>accuracy</b>	±1 % (Temperature drift internal compensated, may be deactivated <sup>2</sup> ), 0.17%/K without compensation)	±1 % (Temperature drift internal compensated, may be deactivated <sup>2</sup> ), 0.17%/K without compensation)	±1 % (Temperature drift internal compensated, may be deactivated <sup>2</sup> ), 0.17%/K without compensation)	±1 % (Temperature drift internal compensated, may be deactivated <sup>2</sup> ), 0.17%/K without compensation)	±1 % (Temperature drift internal compensated, may be deactivated <sup>2</sup> ), 0.17%/K without compensation)
<b>operating voltage U<sub>B</sub></b>	9 to 30 V DC, short-circuit-proof, Class 2	9 to 30 V DC, short-circuit-proof, Class 2	9 to 30 V DC, short-circuit-proof, Class 2	9 to 30 V DC, short-circuit-proof, Class 2	9 to 30 V DC, short-circuit-proof, Class 2
<b>voltage ripple</b>	±10 %	±10 %	±10 %	±10 %	±10 %
<b>no-load supply current</b>	≤ 80 mA	≤ 80 mA	≤ 80 mA	≤ 80 mA	≤ 80 mA
<b>housing</b>	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content
<b>class of protection to EN 60529</b>	IP 67	IP 67	IP 67	IP 67	IP 67
<b>norm conformity</b>	EN 60947-5-2	EN 60947-5-2	EN 60947-5-2	EN 60947-5-2	EN 60947-5-2
<b>type of connection</b>	5-pin initiator plug, PBT	5-pin initiator plug, PBT	5-pin initiator plug, PBT	5-pin initiator plug, PBT	5-pin initiator plug, PBT
<b>controls</b>	2 push-buttons (TouchControl)	2 push-buttons (TouchControl)	2 push-buttons (TouchControl)	2 push-buttons (TouchControl)	2 push-buttons (TouchControl)
<b>indicators</b>	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl
<b>programmable</b>	with TouchControl and LinkControl	with TouchControl and LinkControl	with TouchControl and LinkControl	with TouchControl and LinkControl	with TouchControl and LinkControl
<b>operating temperature</b>	-25 to +70 °C	-25 to +70 °C	-25 to +70 °C	-25 to +70 °C	-25 to +70 °C
<b>storage temperature</b>	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C
<b>weight</b>	150 g	150 g	150 g	210 g	270 g
<b>response time<sup>1)</sup></b>	32 ms	64 ms	92 ms	172 ms	240 ms
<b>time delay before availability</b>	<300 ms	<300 ms	<300 ms	<380 ms	<450 ms
<b>order No.</b>	<b>mic+25/IU/TC</b>	<b>mic+35/IU/TC</b>	<b>mic+130/IU/TC</b>	<b>mic+340/IU/TC</b>	<b>mic+600/IU/TC</b>
<b>current output 4 to 20 mA</b>	R <sub>L</sub> ≤ 100 Ω at 9 V ≤ U <sub>B</sub> ≤ 20 V R <sub>L</sub> ≤ 500 Ω at U <sub>B</sub> ≥ 20 V Rising/falling output characteristic	R <sub>L</sub> ≤ 100 Ω at 9 V ≤ U <sub>B</sub> ≤ 20 V R <sub>L</sub> ≤ 500 Ω at U <sub>B</sub> ≥ 20 V Rising/falling output characteristic	R <sub>L</sub> ≤ 100 Ω at 9 V ≤ U <sub>B</sub> ≤ 20 V R <sub>L</sub> ≤ 500 Ω at U <sub>B</sub> ≥ 20 V Rising/falling output characteristic	R <sub>L</sub> ≤ 100 Ω at 9 V ≤ U <sub>B</sub> ≤ 20 V R <sub>L</sub> ≤ 500 Ω at U <sub>B</sub> ≥ 20 V Rising/falling output characteristic	R <sub>L</sub> ≤ 100 Ω at 9 V ≤ U <sub>B</sub> ≤ 20 V R <sub>L</sub> ≤ 500 Ω at U <sub>B</sub> ≥ 20 V Rising/falling output characteristic
<b>voltage output 0 to 10 V</b>	R <sub>L</sub> ≥ 100 kΩ at U <sub>B</sub> ≥ 15 V, short-circuit-proof Rising/falling output characteristic	R <sub>L</sub> ≥ 100 kΩ at U <sub>B</sub> ≥ 15 V, short-circuit-proof Rising/falling output characteristic	R <sub>L</sub> ≥ 100 kΩ at U <sub>B</sub> ≥ 15 V, short-circuit-proof Rising/falling output characteristic	R <sub>L</sub> ≥ 100 kΩ at U <sub>B</sub> ≥ 15 V, short-circuit-proof Rising/falling output characteristic	R <sub>L</sub> ≥ 100 kΩ at U <sub>B</sub> ≥ 15 V, short-circuit-proof Rising/falling output characteristic

<sup>1)</sup> Can be programmed via TouchControl and LinkControl.  
<sup>2)</sup> Can be deactivated via LinkControl.



Enclosure Type 1  
For use only in industrial machinery NFPA 79 applications.  
The proximity switches shall be used with a Listed (CYJ/77) cable/connector assembly rated minimum 32 Vdc, minimum 290 mA, in the final installation.



Registration no. 75330-19  
Approved on June 25th, 2019

