



### Product description

- The mic+ sensor with one switching output measures the distance to an object within the detection zone contactless. Depending on the adjusted detect distance the switching output is set.
- All settings are done with two push-buttons and a three-digit LED-display (TouchControl).
- Three-colour LEDs indicate the switching status.
- The output functions are changeable from NOC to NCC.
- The sensors are adjustable manually via TouchControl or via Teach-in procedure.
- Useful additional functions are set in the Add-on-menu.
- Using the LinkControl adapter (optional accessory) all TouchControl and additional sensor parameter

### Operating Manual

#### mic+ Ultrasonic Sensors with one switching output an IO-Link

- mic+25/F/TC
- mic+35/F/TC
- mic+130/F/TC
- mic+340/F/TC
- mic+600/F/TC



settings can be adjusted by a Windows® Software.

### IO-Link

The mic+ sensors are IO-Link-capable in accordance with IO-Link specification V1.1 and support Smart Sensor Profile like Digital Measuring Sensor.

The mic+ sensors have a **blind zone** in which distance measurement is not possible. The **operating range** indicates the distance of the sensor that can be applied with normal reflectors with sufficient function reserve. When using good reflectors, such as a calm water surface, the sensor can also be used up to its **maximum range**. Objects that strongly absorb (e.g. plastic foam) or diffusely reflect sound (e.g. pebble stones) can also reduce the defined operating range.

### Safety Notes

- Read the operating instructions prior to start-up.
- Connection, installation and adjustment works may only be carried out by expert personnel.
- No safety component in accordance with the EU Machine Directive, use in the area of personal and machine protection not permitted

### Proper Use

mic+ ultrasonic sensors are used for non-contact detection of objects.

### Synchronisation

If the assembly distance of multiple sensors falls below the values shown in Fig. 1 the integrated synchronisation should be used. Connect Sync/Com-channels (pin 5 at the units receptable) of all sensors (10 maximum).

mic+25...	≥0.35 m	≥2.50 m
mic+35...	≥0.40 m	≥2.50 m
mic+130...	≥1.10 m	≥8.00 m
mic+340...	≥2.00 m	≥18.00 m
mic+600...	≥4.00 m	≥30.00 m

Fig. 1: Assembly distances, indicating synchronisation/multiplex

### Multiplex mode

The Add-on-menu allows to assign an individual address »01« to »10« to each sensor connected via the Sync/Com-channel (Pin5). The sensors perform the ultrasonic measurement sequentially from low to high address. Therefore any influence between the sensors is rejected. The address »00« is reserved to synchronisation mode and deactivates the multiplex mode. To use synchronised mode all sensors must be set to address »00«.

### Installation

- Assemble the sensor at the installation location.
- Plug in the connector cable to the M12 connector, see Fig. 2.

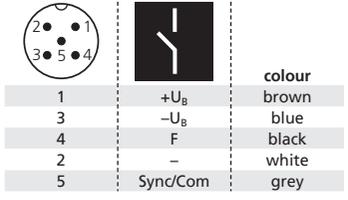


Fig. 2: Pin assignment with view onto sensor plug and colour coding of the microsonic connection cable

### Start-up

- Connect the power supply.
- Set the parameters of the sensor manually via TouchControl (see Fig. 3 and Diagram 1)
- or use the Teach-in procedure to adjust the detect points (see Diagram 2).

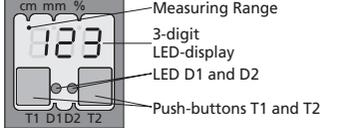


Fig. 3: TouchControl/LED display

### Factory setting

- mic+ sensors are delivered factory made with the following settings:
- Switching output on NOC
- Detecting distance at operating range
- Measurement range set to maximum range

### Maintenance


mic+ sensors work maintenance free. Small amounts of dirt on the surface do not influence function. Thick layers of dirt and caked-on dirt affect sensor function and therefore must be removed.

### Notes


- mic+ sensors have internal temperature compensation. Because the sensors heat up on their own, the temperature compensation reaches its optimum working point after approx. 30 minutes of operation.
- During normal operating mode, a yellow LED D2 signals that the switching output has connected.
- During normal operating mode, the measured distance value is displayed on the LED-indicator in mm (up to 999 mm) or cm (from 100 cm). Scale switches automatically and is indicated by a point on top of the digits.
- During Teach-in mode, the hysteresis loops are set back to factory settings.
- If no objects are placed within the detection zone the LED-indicator shows »---«.
- If no push-buttons are pressed for 20 seconds during parameter setting mode the made changes are stored and the sensor returns to normal operating mode.
- The sensor can be reset to its factory setting, see »Key lock and factory setting«, Diagram 3.
- The latest IODD file and informations about start-up and configuration of pico+ sensors with IO-Link, you will find online at [www.microsonic.de/en/mic+](http://www.microsonic.de/en/mic+).

### Show parameters


- In normal operating mode shortly push T1. The LED display shows »PAR.«
- Each time you tap push-button T1 the actual settings of the analogue output are shown.

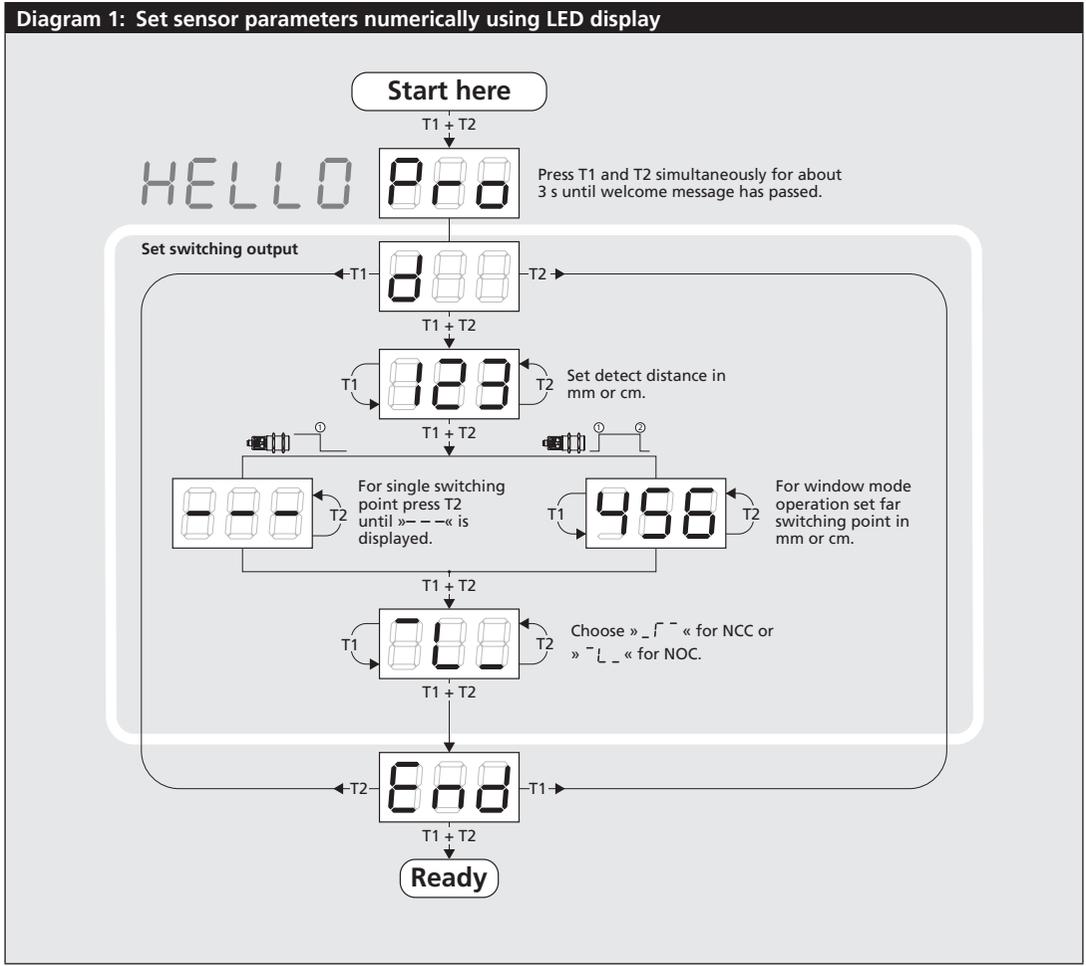


**Diagram 2: Set sensor parameters via Teach-in procedure**

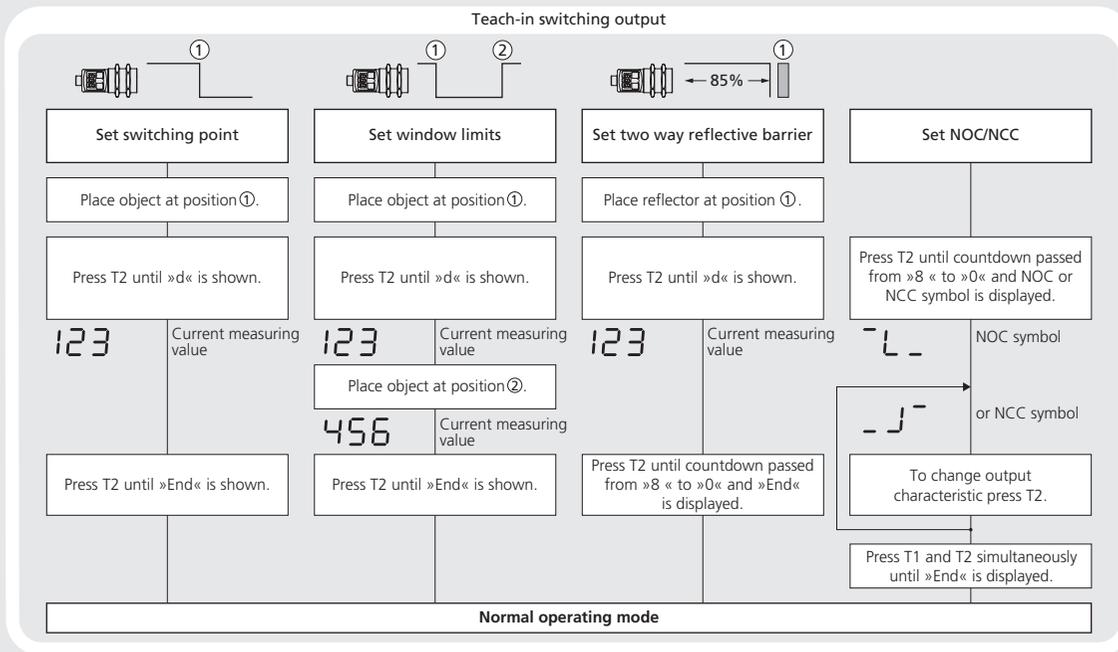

**Diagram 3: Key lock and factory setting**

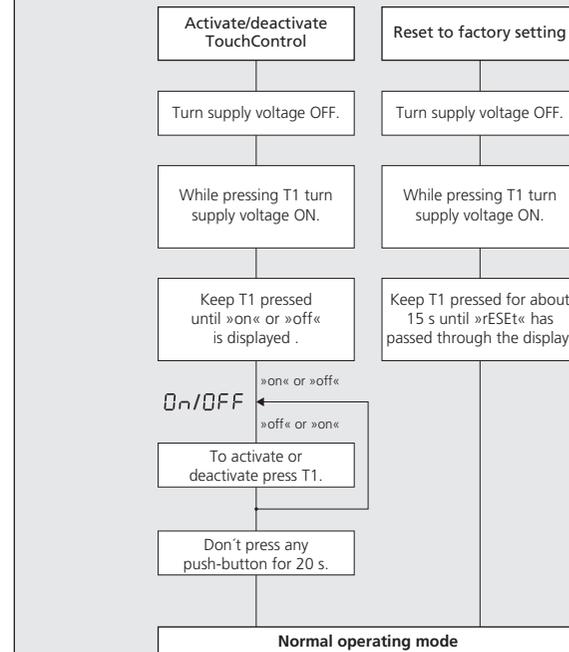


**Diagram 4: Useful additional functions in Add-on menu (for experienced users only, settings not required for standard applications)**

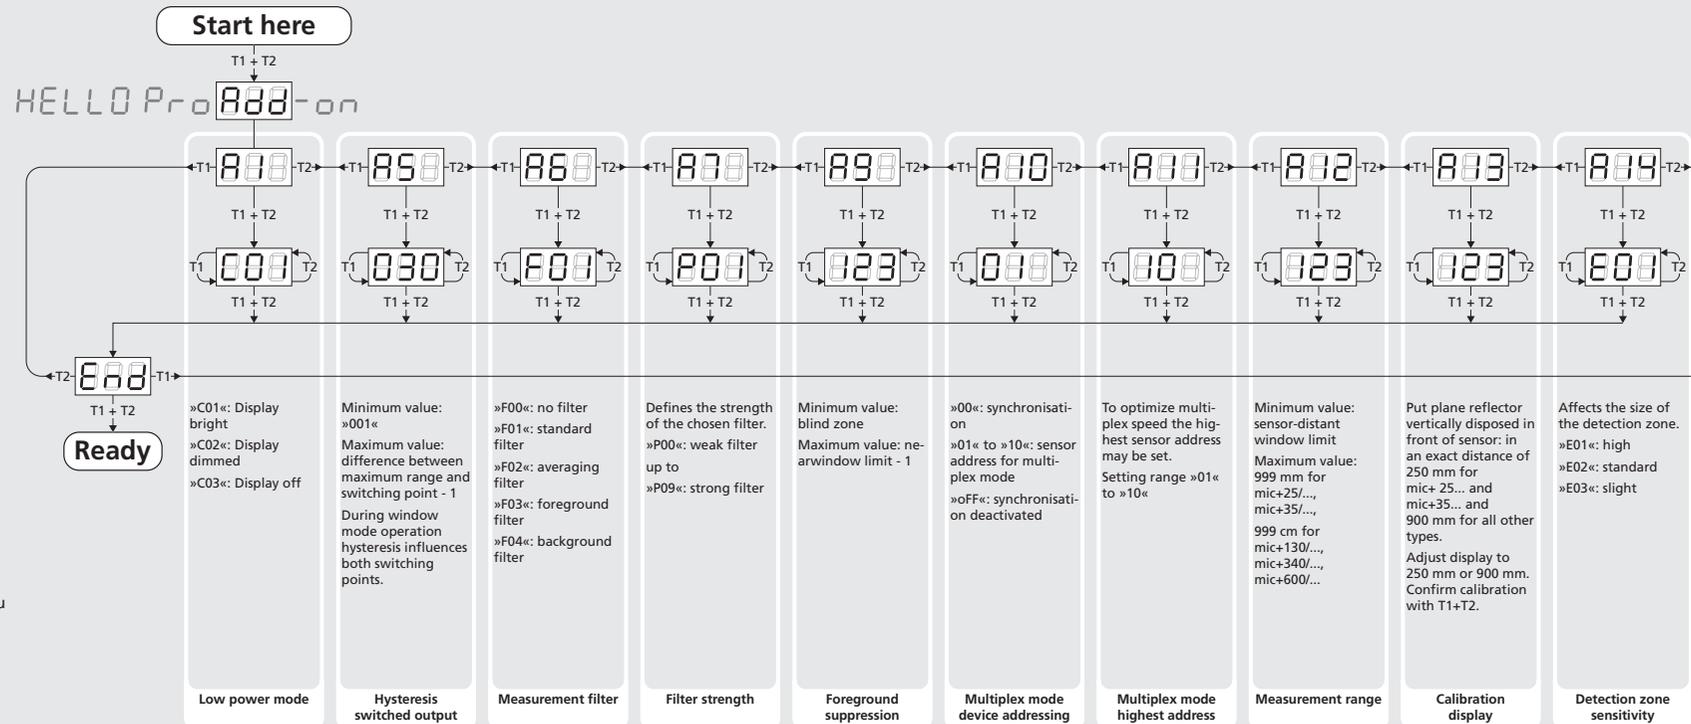


**Note**  
Changes in the Add-on menu may impair the sensor function.  
A6, A7, A10, A11, A12 have influence on the response time of the sensor.


**Technical data**

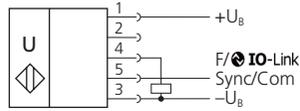


1 Push-Pull output in pnp circuit

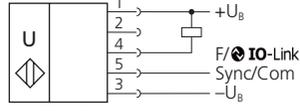

1 Push-Pull output in npn circuit

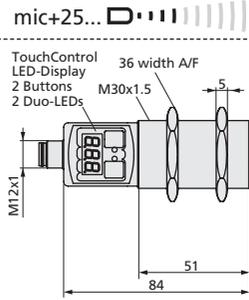


**blind zone** 0 to 30 mm  
**operating range** 250 mm  
**maximum range** 350 mm  
**angle of beam spread** see detection zone  
**transducer frequency** 320 kHz  
**resolution** 0.025 mm

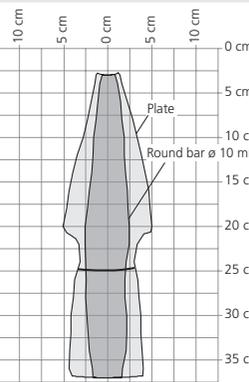


**reproducibility** ±0.15 %  
**accuracy** ±1 % (Temperature drift internal compensated, may be deactivated<sup>3)</sup>, 0.17%/K without compensation)  
**operating voltage Ub** 9 to 30 V DC, short-circuit-proof, Class 2  
**voltage ripple** ±10 %  
**no-load supply current** ≤ 80 mA

**housing** Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**class of protection to EN 60529** IP 67  
**norm conformity** EN 60947-5-2  
**type of connection** 5-pin initiator plug, PBT  
**controls** 2 push-buttons (TouchControl)  
**indicators** 3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl  
**programmable** with TouchControl and LinkControl  
**operating temperature** -25 to +70 °C  
**storage temperature** -40 to +85 °C  
**weight** 150 g  
**switching hysteresis<sup>1)</sup>** 3 mm  
**switching frequency<sup>2)</sup>** 25 Hz  
**response time<sup>2)</sup>** 32 ms  
**time delay before availability** <300 ms

**order No.** mic+25/F/TC  
**switching output** Push-Pull, Ub = 3 V, -Ub + 3 V, Imax = 100 mA switchable NOC/NCC, short-circuit-proof

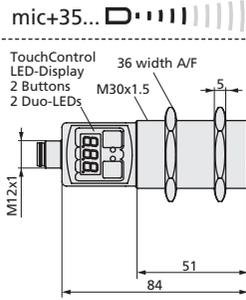


**blind zone** 0 to 65 mm  
**operating range** 350 mm  
**maximum range** 600 mm  
**angle of beam spread** see detection zone  
**transducer frequency** 400 kHz  
**resolution** 0.025 mm

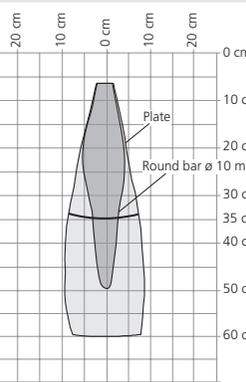


**reproducibility** ±0.15 %  
**accuracy** ±1 % (Temperature drift internal compensated, may be deactivated<sup>3)</sup>, 0.17%/K without compensation)  
**operating voltage Ub** 9 to 30 V DC, short-circuit-proof, Class 2  
**voltage ripple** ±10 %  
**no-load supply current** ≤ 80 mA

**housing** Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**class of protection to EN 60529** IP 67  
**norm conformity** EN 60947-5-2  
**type of connection** 5-pin initiator plug, PBT  
**controls** 2 push-buttons (TouchControl)  
**indicators** 3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl  
**programmable** with TouchControl and LinkControl  
**operating temperature** -25 to +70 °C  
**storage temperature** -40 to +85 °C  
**weight** 150 g  
**switching hysteresis<sup>1)</sup>** 5 mm  
**switching frequency<sup>2)</sup>** 12 Hz  
**response time<sup>2)</sup>** 64 ms  
**time delay before availability** <300 ms

**order No.** mic+35/F/TC  
**switching output** Push-Pull, Ub = 3 V, -Ub + 3 V, Imax = 100 mA switchable NOC/NCC, short-circuit-proof

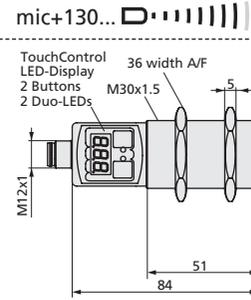


**blind zone** 0 to 200 mm  
**operating range** 1,300 mm  
**maximum range** 2,000 mm  
**angle of beam spread** see detection zone  
**transducer frequency** 200 kHz  
**resolution** 0.18 mm

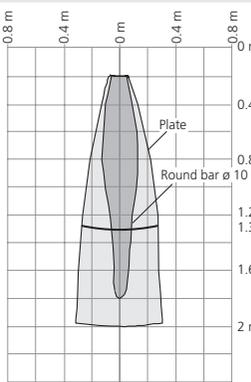


**reproducibility** ±0.15 %  
**accuracy** ±1 % (Temperature drift internal compensated, may be deactivated<sup>3)</sup>, 0.17%/K without compensation)  
**operating voltage Ub** 9 to 30 V DC, short-circuit-proof, Class 2  
**voltage ripple** ±10 %  
**no-load supply current** ≤ 80 mA

**housing** Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**class of protection to EN 60529** IP 67  
**norm conformity** EN 60947-5-2  
**type of connection** 5-pin initiator plug, PBT  
**controls** 2 push-buttons (TouchControl)  
**indicators** 3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl  
**programmable** with TouchControl and LinkControl  
**operating temperature** -25 to +70 °C  
**storage temperature** -40 to +85 °C  
**weight** 150 g  
**switching hysteresis<sup>1)</sup>** 20 mm  
**switching frequency<sup>2)</sup>** 8 Hz  
**response time<sup>2)</sup>** 92 ms  
**time delay before availability** <300 ms

**order No.** mic+130/F/TC  
**switching output** Push-Pull, Ub = 3 V, -Ub + 3 V, Imax = 100 mA switchable NOC/NCC, short-circuit-proof

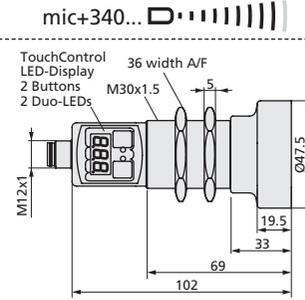


**blind zone** 0 to 350 mm  
**operating range** 3,400 mm  
**maximum range** 5,000 mm  
**angle of beam spread** see detection zone  
**transducer frequency** 120 kHz  
**resolution** 0.18 mm

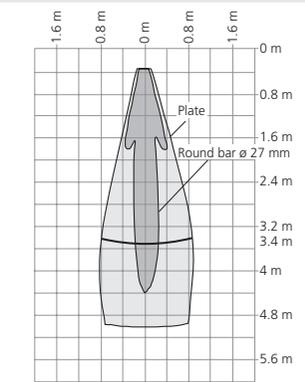


**reproducibility** ±0.15 %  
**accuracy** ±1 % (Temperature drift internal compensated, may be deactivated<sup>3)</sup>, 0.17%/K without compensation)  
**operating voltage Ub** 9 to 30 V DC, short-circuit-proof, Class 2  
**voltage ripple** ±10 %  
**no-load supply current** ≤ 80 mA

**housing** Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**class of protection to EN 60529** IP 67  
**norm conformity** EN 60947-5-2  
**type of connection** 5-pin initiator plug, PBT  
**controls** 2 push-buttons (TouchControl)  
**indicators** 3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl  
**programmable** with TouchControl and LinkControl  
**operating temperature** -25 to +70 °C  
**storage temperature** -40 to +85 °C  
**weight** 210 g  
**switching hysteresis<sup>1)</sup>** 50 mm  
**switching frequency<sup>2)</sup>** 4 Hz  
**response time<sup>2)</sup>** 172 ms  
**time delay before availability** <380 ms

**order No.** mic+340/F/TC  
**switching output** Push-Pull, Ub = 3 V, -Ub + 3 V, Imax = 100 mA switchable NOC/NCC, short-circuit-proof

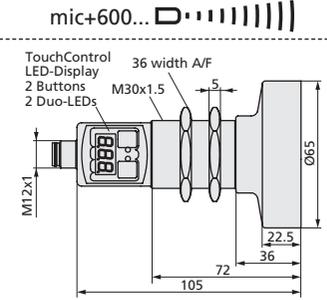

**blind zone** 0 to 600 mm  
**operating range** 6,000 mm  
**maximum range** 8,000 mm  
**angle of beam spread** see detection zone  
**transducer frequency** 80 kHz  
**resolution** 0.18 mm

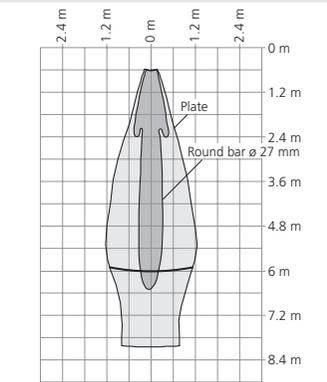

**reproducibility** ±0.15 %  
**accuracy** ±1 % (Temperature drift internal compensated, may be deactivated<sup>3)</sup>, 0.17%/K without compensation)  
**operating voltage Ub** 9 to 30 V DC, short-circuit-proof, Class 2  
**voltage ripple** ±10 %  
**no-load supply current** ≤ 80 mA

**housing** Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**class of protection to EN 60529** IP 67  
**norm conformity** EN 60947-5-2  
**type of connection** 5-pin initiator plug, PBT  
**controls** 2 push-buttons (TouchControl)  
**indicators** 3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl  
**programmable** with TouchControl and LinkControl  
**operating temperature** -25 to +70 °C  
**storage temperature** -40 to +85 °C  
**weight** 270 g  
**switching hysteresis<sup>1)</sup>** 100 mm  
**switching frequency<sup>2)</sup>** 3 Hz  
**response time<sup>2)</sup>** 240 ms  
**time delay before availability** <450 ms

**order No.** mic+600/F/TC  
**switching output** Push-Pull, Ub = 3 V, -Ub + 3 V, Imax = 100 mA switchable NOC/NCC, short-circuit-proof

<sup>1)</sup> Can be programmed via TouchControl, LinkControl and IO-Link.  
<sup>2)</sup> With TouchControl, LinkControl and IO-Link, the selected filter setting and the maximum range influence the switching frequency and the response time.  
<sup>3)</sup> Can be deactivated via LinkControl.



Enclosure Type 1  
 For use only in industrial machinery NFPA 79 applications.

The proximity switches shall be used with a Listed (CYI/7) cable/connector assembly rated minimum 32 Vdc, minimum 290 mA, in the final installation.



Registration no. 75330-19  
 Approved on June 25th, 2019

