


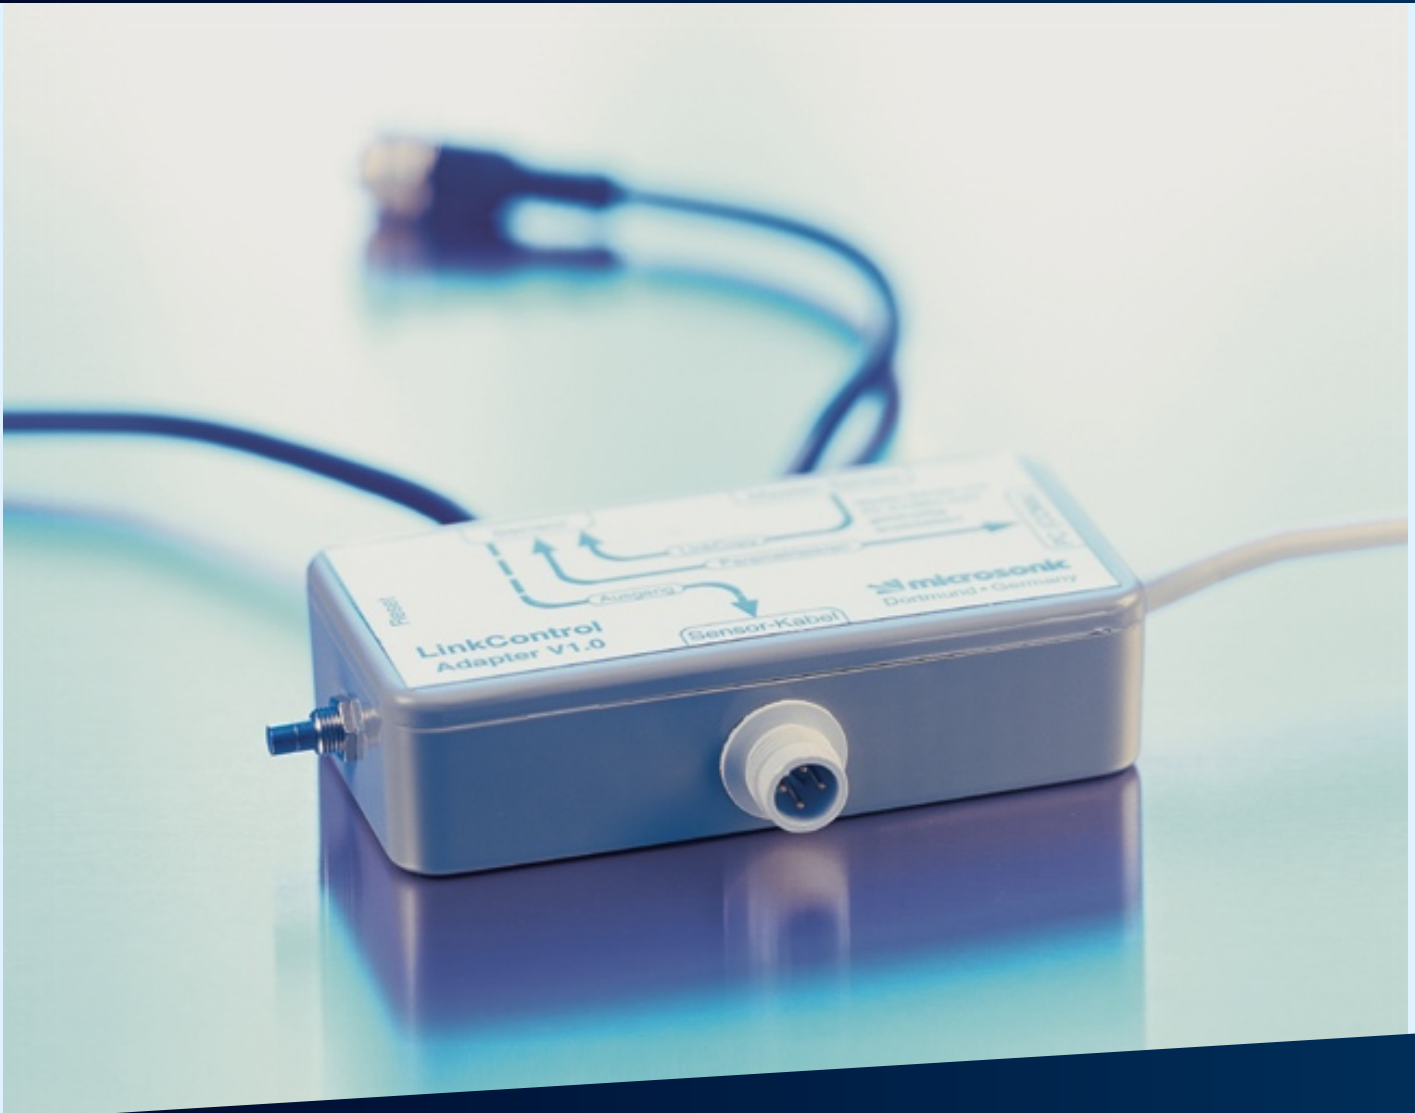

extract from our online catalogue:

LinkControl Adapter 1

current to: 2026-09-02

LinkControl Adapter 1

Successor model available	LCA-2
design	cuboidal
operating mode	accessories
particularities	archive sensor

Electrical Data

operating voltage U_B	10 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	4-pin M8 initiator plug

Inputs

input 1	com input
---------	-----------

housing

material	polystyrene
class of protection to EN 60529	IP 20
operating temperature	+5°C to +60°C
storage temperature	-40°C to +85°C
weight	160 g

Technical Features/Characteristics

controls	1 push-button
----------	---------------