




extract from our online catalogue:

***bks+6/FIU***

current to: 2026-09-03

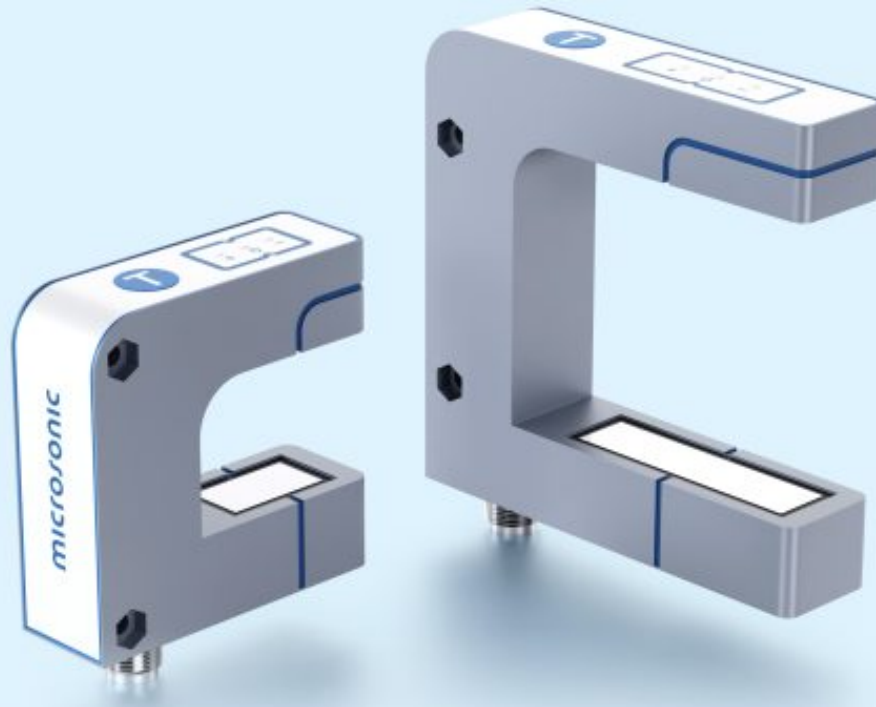

## **bks+**

The bks+ edge sensor facilitates the contact-free web edge scanning of foils, paper and other soundimpermeable materials.

### **Highlights**

- > 2 housing designs > with 30 and 60 mm fork width
- > Available in 12 mm or 40 mm measurement range
- > IO-Link interface > for support of the new industry standard
- > Smart Sensor Profile > more transparency between IO-Link Devices
- > 0.003 mm to 0.01 mm resolution
- > Very compact housing dimensions

### **Basics**

- > UL Listed > to Canadian and US safety standards
- > Contact-free detection of the path edge > for regulation of the web path
- > Analogue output 4–20 mA and 0–10 V > switchable between current and voltage output
- > 3 LEDs and 1 button on the top of the housing
- > Parameterisable with LinkControl
- > Robust metal housing

## ***The bks+ ultrasonic web edge sensor***

is a fork sensor for scanning the edges of sound-impermeable materials such as foil or paper. This is why the bks+ is ideally suited for the web control of high-transparency foils, light-sensitive materials, materials with greatly varying transparency and paper subject to high paper dust loads.

The working range for the bks+3/FIU/A is 12 mm and for the bks+6/FIU/A is 40 mm.

### ***The functional principle***

Both transducer and receiver are placed in a single, slim fork housing. The transducer in the lower leg emits short, cyclical sound pulses. These are detected by the ultrasonic receiver in the upper leg of the fork. A material embedded in the fork covers the sound gap and thereby dampens the receiving signal in depending on the coverage. This is analysed by internal electronics.

An analogue signal is output depending of coverage, resp. data word via IO-Link.

### ***The bks+ sensors are equipped with:***



1 Push-Pull switching output with pnp or npn switching technology and 1 analogue output 4–20 mA and 0–10 V.

### ***Using the Teach-in button***

on the upper side of the edge sensor sets the zero point for the local edge. This calibration can be done in two ways:

- clear the fork completely of any web material,
- push the button for approx. 3 seconds
- cover the fork sensor completely and push the button briefly (< 1 s). Ready. Or
- adjust the path edge within the fork to both markings so that 50 % of the sound gap is covered,
- then push the button for approx. 6 seconds. Ready.



*With a fork width of only 30 mm and 60 mm respectively and a depth of 33 mm and 73 mm respectively, it has a very compact design. Its working range of 12 mm and 40 mm respectively and its high accuracy of 0.1 mm permit a wide variety of applications.*

The edge sensor bks+3 has a fork width of 30 mm and a fork depth of 43 mm. The bks+6 web edge sensor has a fork width of 60 mm and a fork depth of 73 mm. Other fork widths and depths are available upon request. The housing side is equipped with two consistent bores for the edge sensor's mounting. The electrical connection is established via an M12 circular plug.

### **Three LEDs**

show the position of the web material within the fork. When using light-sensitive materials, the LEDs can be switched off.

### **Switching over**

between current and voltage outputs is done by using the button or LinkControl. The bks+ is preset and can be used immediately. Optionally, it can also be comprehensively parameterised using LinkControl adapter LCA-2.

### **Updated to IO-Link version 1.1.3**


The bks+ sensors with the extension "/A" in the order name now support IO-Link 1.1.3 and the Smart Sensor Profile.

The predecessor models bks+3/FIU and bks+6/FIU can be found in the [sensor archive](#).

## ***You have special requirements?***

Nothing as simple as that.

With us, you can easily find an individual solution. Let us talk about your application: +49 231 97 51 51-82.

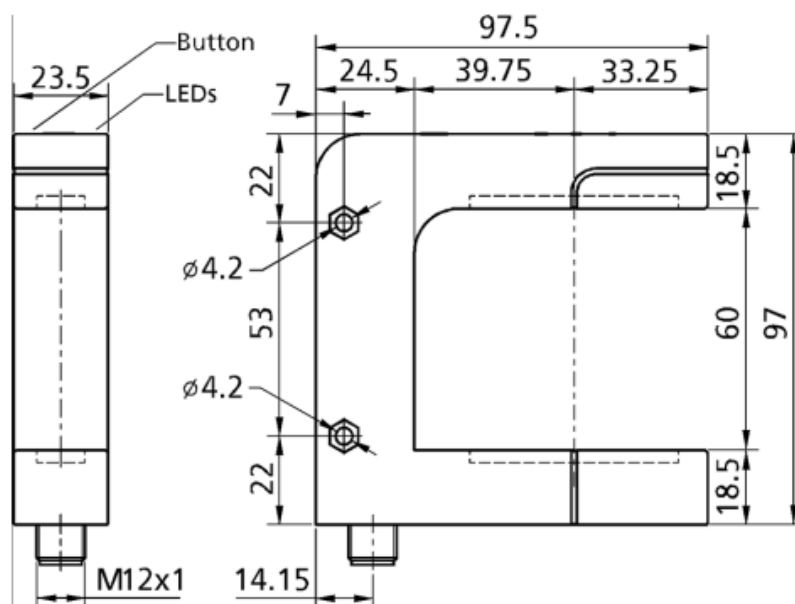

Successor model available

bks+6/FIU/A



1 x Push-Pull + 1 x analogue 4-20 mA / 0-10 V

|                 |                             |
|-----------------|-----------------------------|
| design          | fork-like                   |
| operating mode  | IO-Link<br>web edge control |
| working range   | $\geq 40$ mm ( $\pm 20$ mm) |
| particularities | IO-Link<br>UL Listed        |

**Ultrasonic-Specific**

|                      |                                             |
|----------------------|---------------------------------------------|
| means of measurement | pulse operation with amplitude evaluation   |
| transducer frequency | 310 kHz                                     |
| blind zone           | 5 mm in front of transmitter and receiver   |
| resolution           | 0,01 mm                                     |
| reproducibility      | $\pm 0.1$ mm at constant ambient conditions |

**Electrical Data**

|                             |                                             |
|-----------------------------|---------------------------------------------|
| operating voltage $U_B$     | 20 - 30 V d.c., reverse polarity protection |
| voltage ripple              | $\pm 10$ %                                  |
| no-load current consumption | $\leq 60$ mA                                |
| type of connection          | 5-pin M12 initiator plug                    |

## outputs

|                             |                                                                                                         |
|-----------------------------|---------------------------------------------------------------------------------------------------------|
| output 1                    | analogue output<br>current: 4-20 mA / voltage: 0-10 V, short-circuit-proof<br>switchable rising/falling |
| Ausgang 2                   | switching output<br>Push-Pull, $U_B - 3\text{ V}$ , $-U_B + 3\text{ V}$ , $I_{\max} = 100\text{ mA}$    |
| response delay              | 6 ms                                                                                                    |
| delay prior to availability | < 300 ms                                                                                                |

## Inputs

|         |                                                      |
|---------|------------------------------------------------------|
| input 1 | com input<br>synchronisation input<br>teach-in input |
|---------|------------------------------------------------------|

## housing

|                                 |                                                    |
|---------------------------------|----------------------------------------------------|
| material                        | zinc die-casting, plastic parts, PBT               |
| ultrasonic transducer           | polyurethane foam, epoxy resin with glass contents |
| class of protection to EN 60529 | IP 65                                              |
| operating temperature           | +5°C to +60°C                                      |
| storage temperature             | -40°C to +85°C                                     |
| weight                          | 280 g                                              |

## Technical Features/Characteristics

|                    |                                                               |
|--------------------|---------------------------------------------------------------|
| controls           | 1 push-button                                                 |
| scope for settings | Teach-in via push-button<br>LCA-2 with LinkControl<br>IO-Link |

## Accessories

|                      |                                                                                   |
|----------------------|-----------------------------------------------------------------------------------|
| deployable accessory | KST5A-2/M12<br>KST5A-5/M12<br>KST5G-2/M12<br>KST5G-5/M12<br>LCA-2<br>LCA-2 Koffer |
|----------------------|-----------------------------------------------------------------------------------|

## pin assignment

