


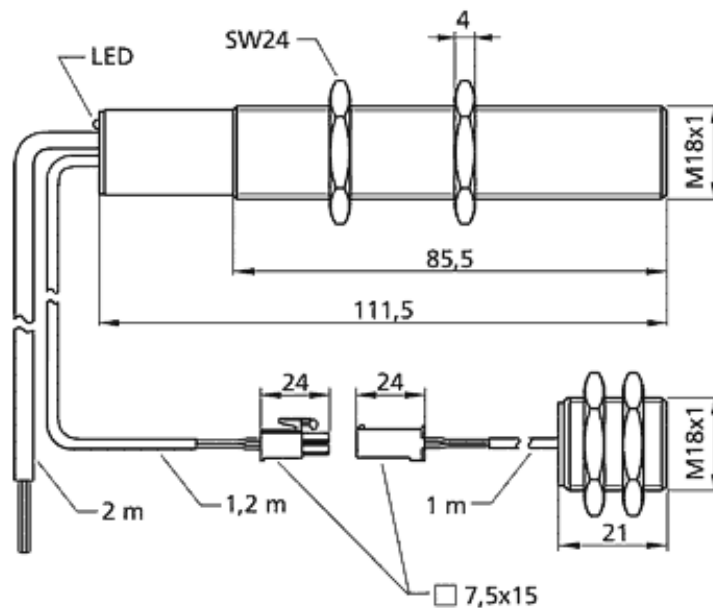

extract from our online catalogue:

dbk-4/Empf/CDD/O/M18 / TB2

current to: 2026-09-03

dbk-4/Empf/CDD/O/M18 / TB2**scale drawing**

Successor model available

please inquire



2 x pnp

design

cylindrical M18

operating mode

double sheet control

working range

papers with weights of 20 - 1,200 g/m², metal-laminated sheets and films up to 0.4 mm thick, self-adhesive films, sheet metals up to 0.3 mm thick, fine corrugated card

particularities

receiver für ultrasonic-double sheet control
distance between transmitter and receiver can be selected**Ultrasonic-Specific**

means of measurement

pulse operation with amplitude evaluation

transducer frequency

400 kHz

blind zone

7 mm in front of transmitter and receiver

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 45 \text{ mA}$
type of connection	2 m PVC cable, $5 \times 0.25 \text{ mm}^2$

outputs

output 1	double sheet output pnp: $I_{\max} = 500 \text{ mA}$ ($U_B - 2V$) NCC, short-circuit-proof
Ausgang 2	missing sheet output pnp: $I_{\max} = 500 \text{ mA}$ ($U_B - 2V$) NCC, short-circuit-proof
response delay	2.5 ms or 6.5 ms in free-run mode

Inputs

input 1	control input
---------	---------------

housing

material	brass sleeve, nickel-plated, plastic parts, PBT
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 65
operating temperature	+5°C to +60°C
storage temperature	-40°C to +85°C
weight	130 g
further versions	dbk-4/CDD/O/M18 E+S/ TB2

Technical Features/Characteristics

controls	not necessary
scope for settings	not necessary
indicators	1 x Duo-LED; green: working / red: double sheet / flashing green: missing sheet

Accessories

deployable accessory	BF-18 dbk-Testbogen
----------------------	------------------------

pin assignment



