

EVERY THING ULTRA SONIC

extract from our online catalogue:

zws ultrasonic sensors

current to: 2026-09-09



ZWS

The zws sensors featuring a cubical housing and a Teach-in button are among the market's smallest available ultrasonic sensors.

Highlights

- › Ultrasonic sensor in miniature housing
- › Installation-compatible with many optical sensors › a true alternative for critical applications
- › Up to 250 Hz switching frequency › for fast sampling
- › Optionally with SoundPipe zws1 waveguide attachment
- › New! Twin mode or external synchronisation via SyncBox2
- › Improved temperature compensation › adjustment to working conditions within 45 seconds

Basics

- › UL Listed to Canadian and US safety standards
- › 1 switching output in pnp or npn variant
- › Analogue output 4–20 mA or 0–10 V
- › 6 detection ranges with a measurement range of 20 mm to 1 m
- › microsonic Teach-in by using a button
- › 20–30 V operating voltage

The miniature sensor housing

of the zws-15 has dimensions of 20 mm x 32 mm x 12 mm. The housing's design and mounting is compatible with many optical sensors. This facilitates the conversion to ultrasonic sensors for critical applications.

The Teach-in button

on the top facilitates the convenient setting of the sensor.

Two LEDs

in the sensor housing's upper half indicate the switching output and respectively the analogue output states.

The temperature compensation of the analogue sensors

profits from a significant improvement. The sensors reach their operating point only 45 seconds after switching on operating voltage.

For the zws sensor family

2 output versions and 6 detection ranges are available:



1 switching output, optionally in pnp or npn circuitry



1 analogue output 4–20 mA or 0–10 V

The zws sensors with switching output have three operating modes:


- Single switching point (Method A and B)
- Two-way reflective barrier
- Window mode

The operating mode single switching point (Method A)


is suitable for applications, in which the actual distance to the object is also the switching point. A typical application is level control, where the ultrasonic sensor detects the filling level vertically from above during the filling process. The taught switching point corresponds to the maximum filling level.

The operating mode single switching point +8% (Method B)

is recommended by objects, which move into the detection area from the side. In this case the switching distance is set 8 % further than the actual measured distance to the object. This ensures a reliable switching distance even if the height of the objects varies slightly.

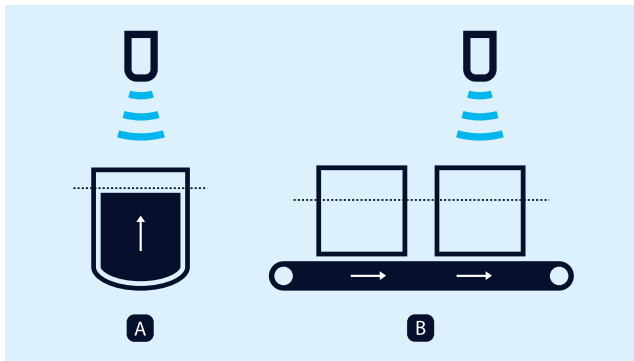

Teach-in of a switching point Method A and Method B

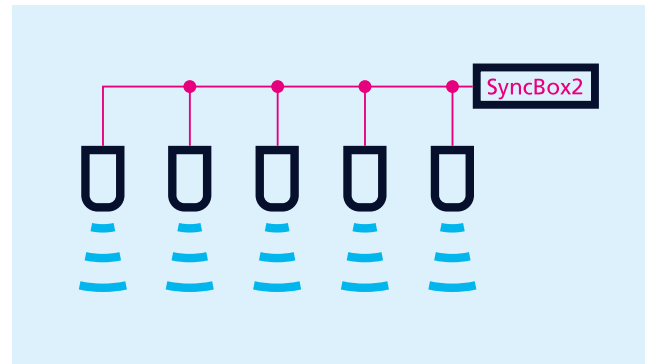

Synchronisation of up to 50 zws sensors

Twin mode or external synchronisation

If two switching zws sensors are operating too close to one another, twin mode can be selected to avoid mutual influences. This new feature is integrated in zws sensors from firmware V3.

If more than two zws sensors need to be synchronised, the accessory SyncBox2 can be used. The SyncBox2 generates a synchronisation signal output on pin 2. This permits up to 50 zws sensors to be autonomously synchronised.

High counting frequencies, short response times - no problem for the zws-7 ultrasonic sensor

zws-7: 250 Hz switching frequency for fast measurement

At a maximum detection range of 100 mm, the zws-7 can achieve a switching frequency of 250 Hz. This allows both detection of objects with a high counting frequency and extremely narrow gaps between two objects at fast machinery speeds. The zws-7 responds under 3 ms. Additionally fitting the new SoundPipe zws1 (Accessories) to the zws-7 markedly raises the power to detect narrow gaps between two objects at high machine speeds.



Fast zws-7 - Fast zws-7/-15 with SoundPipe



The zws-7, with a 250 Hz switching frequency, is particularly suitable for counting tasks at high machine speeds.


Set zws sensor via Teach-in procedure

The zws sensors with switching output have three operating modes:


- Single switching point (Method A and B)
- Two-way reflective barrier
- Window mode

Teach-in of a single switching point (Method A)

- Place the object to be detected at the desired distance (1).
- Push the button for about 3 seconds.
- Then push the button again for about 1 second.
- Ready.

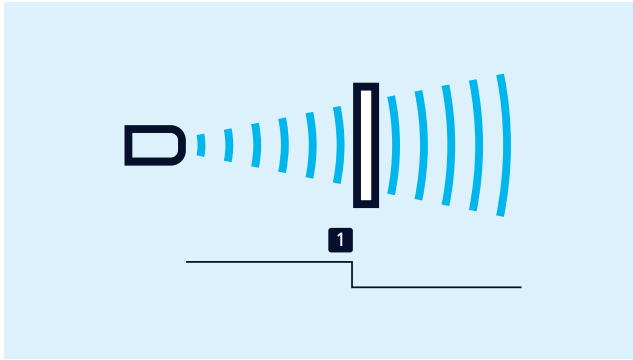

Teach-in of a switching point (Method A)

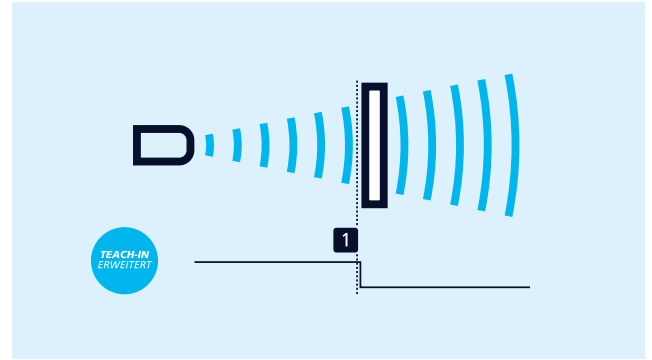


Teach-in of a switching point +8% (Method B)

Teach-in of a single switching point +8% (Method B)


- Place the object to be detected at the desired distance (1).
- Push the button for about 3 seconds.
- Then push the button again for about 3 seconds.
- Ready.

Teach-in of a two-way reflective barrier

with a fixed reflector can be set up with the help of a permanently mounted reflector by mounting the zws sensor and the reflector, then pressing the button for approx. 3 seconds and then pressing it once more for approx. 10 seconds. Now, the two-way reflective barrier has been set.

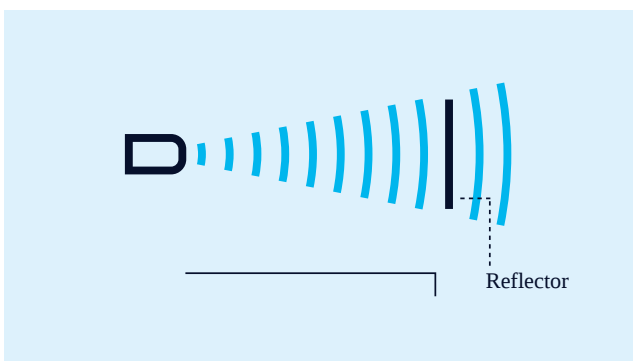

Teach-in of a two-way reflective barrier

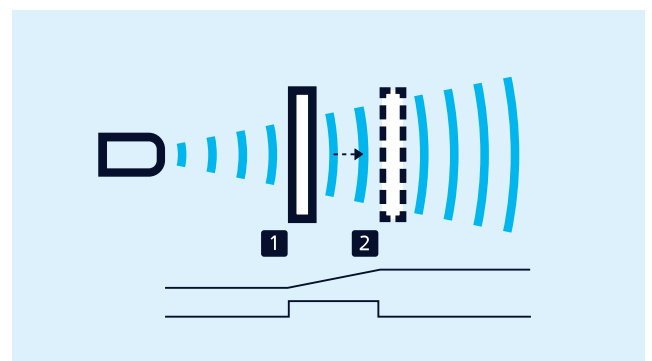

Teach-in of an analogue characteristic or of a window with two switching points

Set the analogue output

by initially positioning the object to be detected on the sensor-close window limit (1), pressing the button for approx. 3 seconds, shifting the object to the sensor-distant window limit (2) and pressing the button once more for approx. 1 second. Ready.

To set a window

with two detection points on a single switching output, the procedure is the same as setting the analogue.


NCC/NOC

and rising/falling analogue characteristic curve can also be set using the push-button.


zws-15 with SoundPipe - 1st place for sound field focusing (e.g. for level control)

Brings on intensively bundled sound field directly to the measuring point

The SoundPipe zws1 (Accessories) can be used with any zws-15 or zws-7 sensor. It directs sound to the measuring point thus allowing measurements to be taken in drill holes and openings with diameters under 5 mm. Measurement can be carried out directly before the sound exit opening, since the blind zone is inside the SoundPipe.

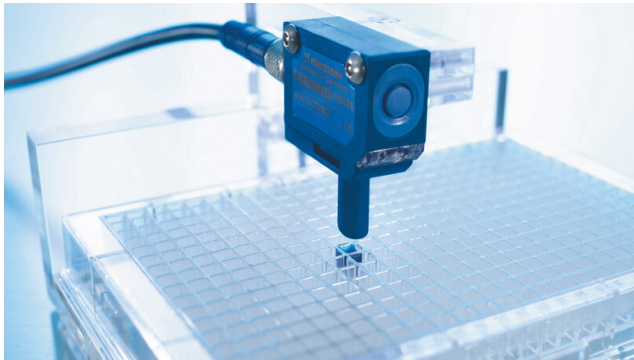

With the SoundPipe, the zws-15 sensor can measure fill levels in the smallest of openings.

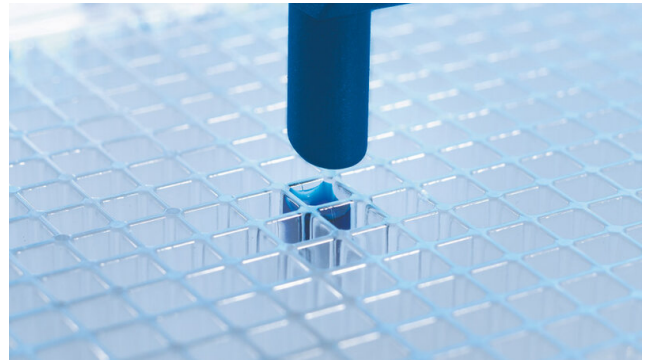

The SoundPipe is directly positioned over the measuring point.

The SoundPipe zws1 is attached to the front of the zws-15 or zws-7 sensor. A typical field of application is measuring levels in microplate wells which are used in medical analysis technology. The SoundPipe zws1 can be directly placed over the opening; this makes exact positioning that much easier. The attachment can also be used in scanning gaps of only a few millimetres in width between two objects.

The zws sensors are ideal for probing of circuit boards and wafers in the electronic industry or for use in packaging machines in which high-transparency films must be detected.


You have special requirements?

Nothing as simple as that.


With us, you can easily find an individual solution. Let us talk about your application: +49 231 97 51 51-82.

zws-15/CI/QS

scale drawing

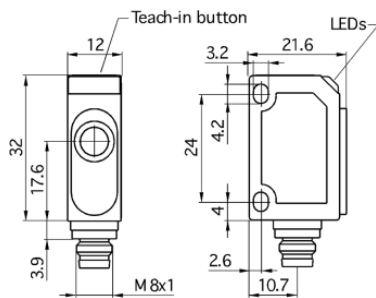

detection zone

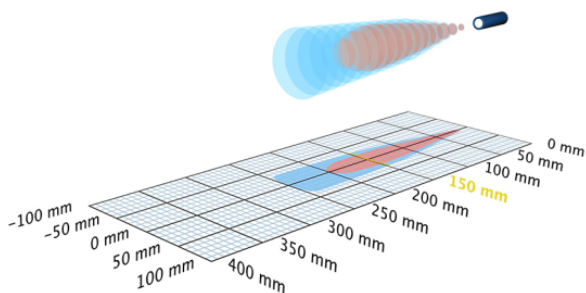

 1 x analogue 4-20 mA
  250 mm


design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	150 mm
max. range	250 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

zws-15/CU/QS

scale drawing

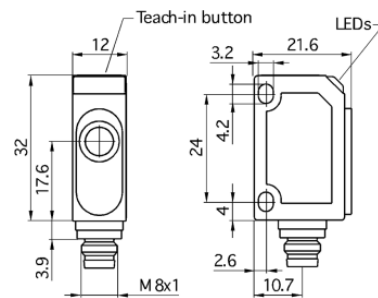

detection zone

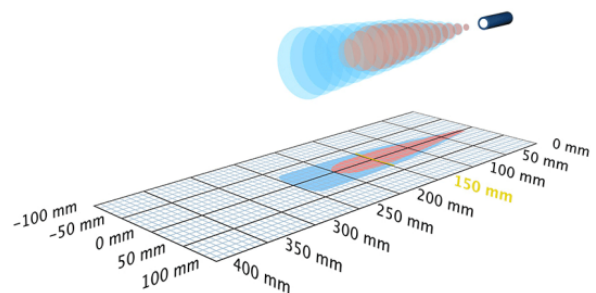

 1 x analogue 0-10 V
  250 mm

design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	150 mm
max. range	250 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 25\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	analogue output current: 4-20 mA switchable rising/falling
response delay	50 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g
further versions	zws-15/SI/CI/QS

Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: object in the window

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 25\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	analogue output voltage: 0-10 V, short-circuit-proof switchable rising/falling
response delay	50 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g
further versions	zws-15/SI/CU/QS


Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: object in the window

Accessories

deployable accessory	KST4A-2/M8
	KST4A-5/M8
	KST4G-2/M8
	KST4G-5/M8
	MW-ZWS 2
	MW-ZWS 3
	SoundPipe zws1
	SyncBox2


pin assignment



Accessories


deployable accessory	KST4A-2/M8
	KST4A-5/M8
	KST4G-2/M8
	KST4G-5/M8
	MW-ZWS 2
	MW-ZWS 3
	SoundPipe zws1
	SyncBox2

pin assignment




zws-24/CI/QS


scale drawing

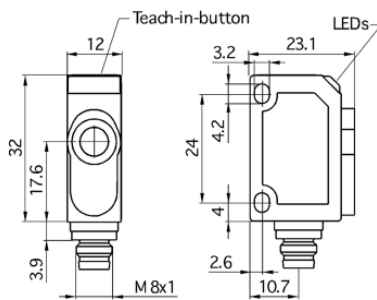

detection zone

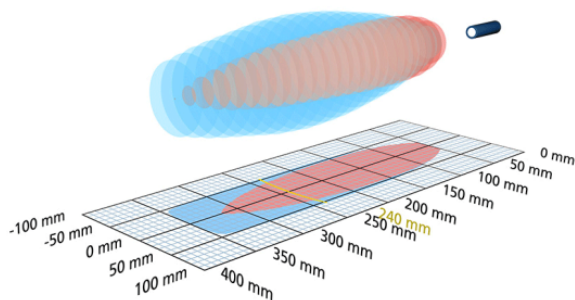

∫ 1 x analogue 4-20 mA



350 mm


design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	500 kHz
blind zone	55 mm
operating range	240 mm
max. range	350 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

zws-24/CU/QS


scale drawing

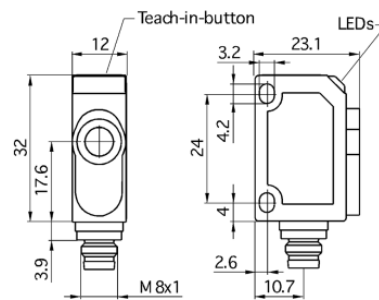

detection zone

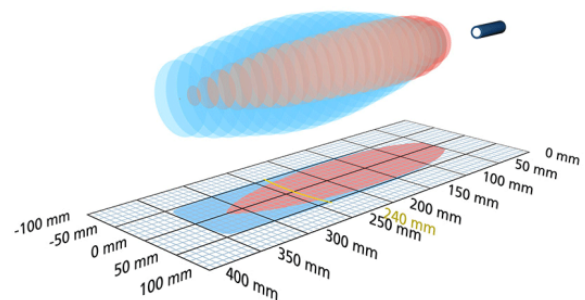

∫ 1 x analogue 0-10 V



350 mm

design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	500 kHz
blind zone	55 mm
operating range	240 mm
max. range	350 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 30 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	analogue output current: 4-20 mA switchable rising/falling
response delay	50 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g

Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: object in the window

Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 2 MW-ZWS 3 SyncBox2
----------------------	--

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 30 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	analogue output voltage: 0-10 V, short-circuit-proof switchable rising/falling
response delay	50 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g


Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: object in the window


Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 2 MW-ZWS 3 SyncBox2
----------------------	--

pin assignment




pin assignment




zws-25/CI/QS

scale drawing

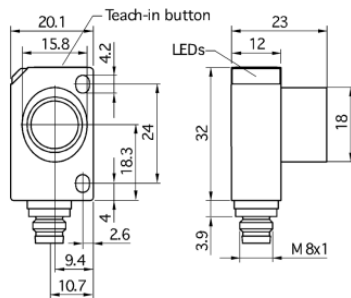

detection zone

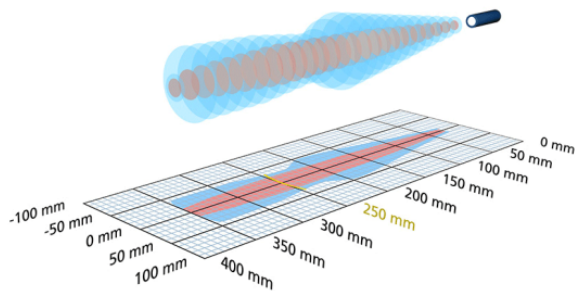

 1 x analogue 4-20 mA
  350 mm


design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
max. range	350 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

zws-25/CU/QS

scale drawing

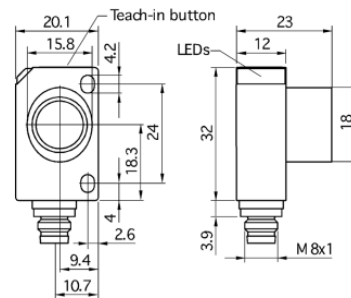

detection zone

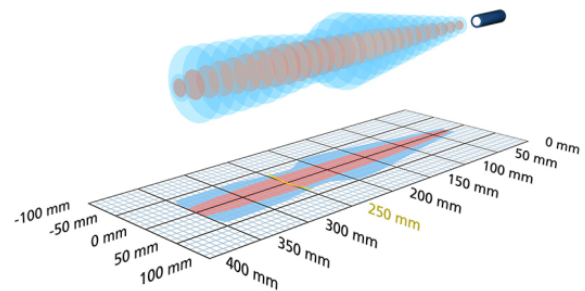

 1 x analogue 0-10 V
  350 mm

design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
max. range	350 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B 20 - 30 V d.c., reverse polarity protection

voltage ripple $\pm 10\%$

no-load current consumption $\leq 25\text{ mA}$

type of connection 4-pin M8 initiator plug

outputs

output 1 analogue output
current: 4-20 mA
switchable rising/falling

response delay 50 ms

delay prior to availability $< 300\text{ ms}$

Inputs

input 1 synchronisation input

housing

material ABS

ultrasonic transducer polyurethane foam, epoxy resin with glass contents

class of protection to EN 60529 IP 67

operating temperature -25°C to $+70^\circ\text{C}$

storage temperature -40°C to $+85^\circ\text{C}$

weight 11 g

Technical Features/Characteristics

temperature compensation yes

controls 1 push-button

scope for settings Teach-in via push-button

synchronization yes

multiplex no

indicators 1 x LED green: working, 1 x LED yellow: object in the window

Accessories

deployable accessory KST4A-5/M8
KST4A-2/M8
KST4G-2/M8
KST4G-5/M8
MW-ZWS 1
SyncBox2

Electrical Data

operating voltage U_B 20 - 30 V d.c., reverse polarity protection

voltage ripple $\pm 10\%$

no-load current consumption $\leq 25\text{ mA}$

type of connection 4-pin M8 initiator plug

outputs

output 1 analogue output
voltage: 0-10 V, short-circuit-proof
switchable rising/falling

response delay 50 ms

delay prior to availability $< 300\text{ ms}$

Inputs

input 1 synchronisation input

housing

material ABS

ultrasonic transducer polyurethane foam, epoxy resin with glass contents

class of protection to EN 60529 IP 67

operating temperature -25°C to $+70^\circ\text{C}$

storage temperature -40°C to $+85^\circ\text{C}$

weight 11 g

Technical Features/Characteristics

temperature compensation yes

controls 1 push-button

scope for settings Teach-in via push-button

synchronization yes


multiplex no

indicators 1 x LED green: working, 1 x LED yellow: object in the window


Accessories

deployable accessory KST4A-2/M8
KST4A-5/M8
KST4G-2/M8
KST4G-5/M8
MW-ZWS 1
SyncBox2

pin assignment




pin assignment




zws-35/CI/QS

scale drawing



detection zone

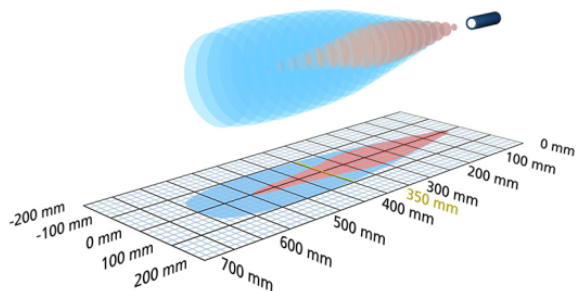

1 x analogue 4-20 mA  600 mm


design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	64 mm
operating range	350 mm
max. range	600 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

zws-35/CU/QS

scale drawing



detection zone

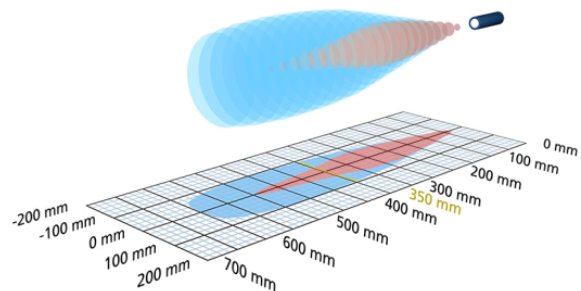

1 x analogue 0-10 V  600 mm

design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	64 mm
operating range	350 mm
max. range	600 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 35\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	analogue output current: 4-20 mA switchable rising/falling
response delay	80 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g

Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: object in the window

Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 35\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	analogue output voltage: 0-10 V, short-circuit-proof switchable rising/falling
response delay	80 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g


Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: object in the window


Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

pin assignment




pin assignment




zws-70/CU/QS

scale drawing



detection zone

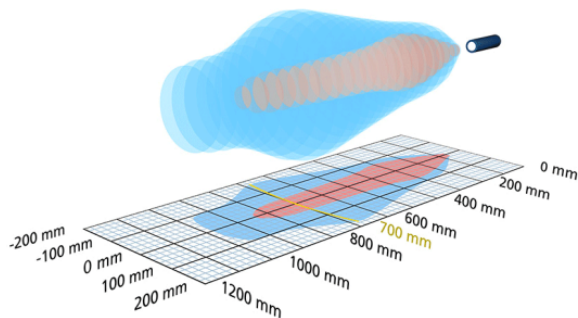

1 x analogue 0-10 V 1,000 mm


design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	300 kHz
blind zone	120 mm
operating range	700 mm
max. range	1,000 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

zws-70/CI/QS

scale drawing



detection zone

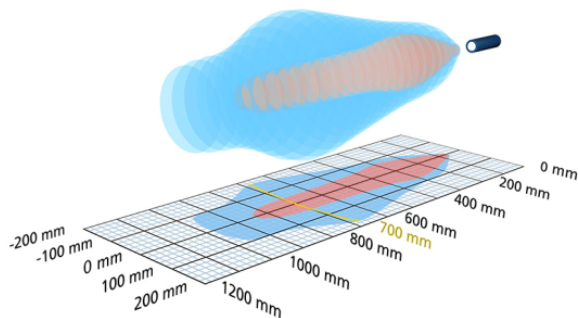

1 x analogue 4-20 mA 1,000 mm

design	cuboidal
operating mode	analogue distance measurements
particularities	kleine quaderförmige Bauform UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	300 kHz
blind zone	120 mm
operating range	700 mm
max. range	1,000 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 30 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	analogue output voltage: 0-10 V, short-circuit-proof switchable rising/falling
response delay	70 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g

Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: object in the window

Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 30 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	analogue output current: 4-20 mA switchable rising/falling
response delay	70 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g


Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: object in the window


Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

pin assignment




pin assignment



zws-7/CD/QS

scale drawing

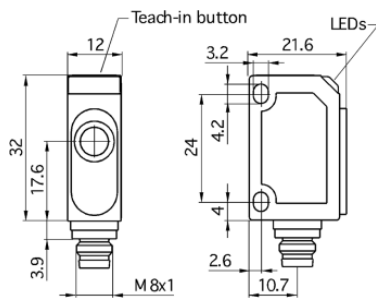

1 x pnp

100 mm

design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	250 Hz Schaltfrequenz kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	70 mm
max. range	100 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

Electrical Data


operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 30 mA
type of connection	4-pin M8 initiator plug

zws-15/CD/QS

scale drawing

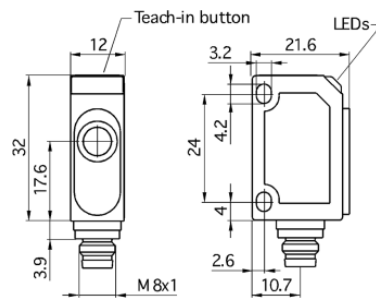

detection zone

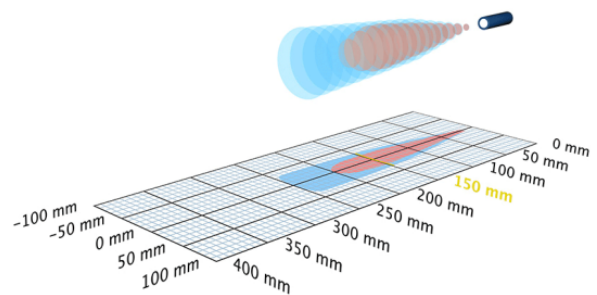

1 x pnp

250 mm

design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	150 mm
max. range	250 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B = 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	250 Hz
response delay	3 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 2 MW-ZWS 3 SoundPipe zws1 SyncBox2
----------------------	--

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B = 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	25 Hz
response delay	24 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------


housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g
further versions	zws-15/CD/QS /K0.15 zws-15/CD/QS /K10,0
further versions	cable connection (on request)

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	no
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status


pin assignment



Accessories


deployable accessory	KST4A-2/M8
	KST4A-5/M8
	KST4G-2/M8
	KST4G-5/M8
	MW-ZWS 2
	MW-ZWS 3
	SoundPipe zws1
	SyncBox2

pin assignment




zws-15/CD/QS /K0.15

scale drawing

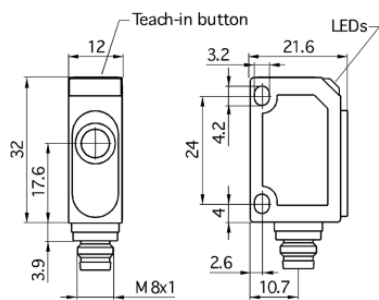

detection zone

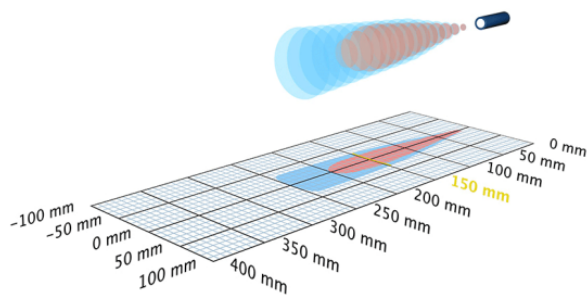


design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	small cuboidal design cable connection narrow sound field

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	150 mm
max. range	250 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

zws-15/CD/ 5ms.a

scale drawing

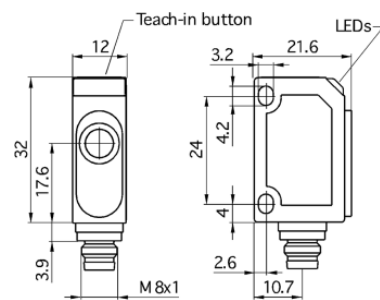

detection zone

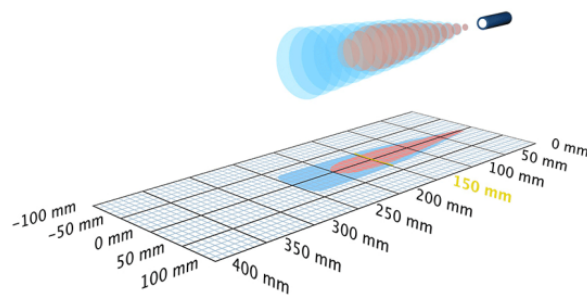

design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	50 Hz switching frequency small cuboidal design narrow sound field

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	150 mm
max. range	250 mm
resolution	0.056 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	0.15 m PUR cable, $4 \times 0.14 \text{ mm}^2$

outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	25 Hz
response delay	24 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	no
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	MW-ZWS 2 MW-ZWS 3 SoundPipe zws1 SyncBox2
----------------------	--

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	100 Hz
response delay	7 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g


Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	KST4A-2/M8
	KST4A-5/M8
	KST4G-2/M8
	KST4G-5/M8
	MW-ZWS 2
	MW-ZWS 3
	SoundPipe zws1
	SyncBox2

pin assignment



Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	10 m PVC cable, $4 \times 0.14 \text{ mm}^2$

outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	25 Hz
response delay	24 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	no
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	MW-ZWS 2 MW-ZWS 3 SoundPipe zws1 SyncBox2
----------------------	--

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	25 Hz
response delay	24 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g


Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	no
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories


deployable accessory	KST4A-2/M8
	KST4A-5/M8
	KST4G-2/M8
	KST4G-5/M8
	MW-ZWS 2
	MW-ZWS 3
	SyncBox2

pin assignment




zws-25/CD/QS

scale drawing

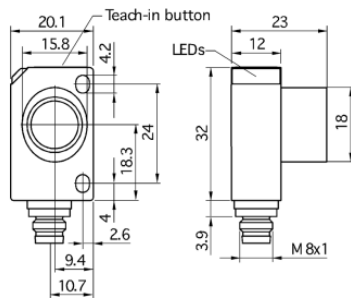

detection zone

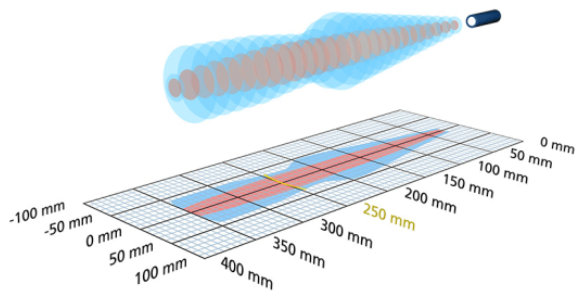

1 x pnp

350 mm


design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
max. range	350 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

zws-35/CD/QS

scale drawing



detection zone

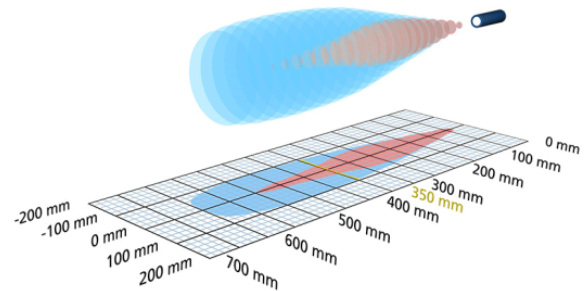

1 x pnp

600 mm

design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	64 mm
operating range	350 mm
max. range	600 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	31 Hz
response delay	20 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	no
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	15 Hz
response delay	48 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g


Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	no
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status


Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

pin assignment




pin assignment




zws-70/CD/QS

scale drawing



detection zone

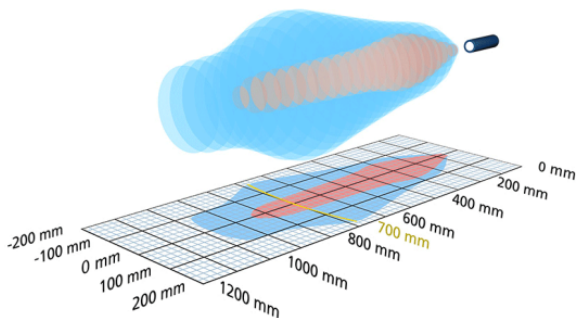

1 x pnp




design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	300 kHz
blind zone	120 mm
operating range	700 mm
max. range	1,000 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

zws-7/CE/QS

scale drawing

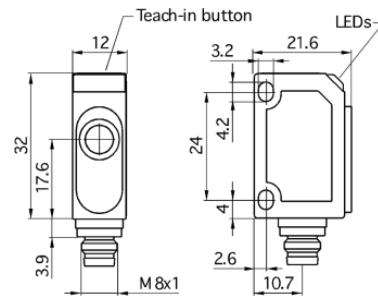

1 x npn



design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	250 Hz Schaltfrequenz kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	70 mm
max. range	100 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 30 mA
type of connection	4-pin M8 initiator plug

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 25\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output pnp: $I_{\max} = 200\text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	11 Hz
response delay	36 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	no
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

outputs

output 1	switching output npn: $I_{\max} = 200\text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	250 Hz
response delay	3 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g


Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status


Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 2 MW-ZWS 3 SoundPipe zws1 SyncBox2
----------------------	--

pin assignment




pin assignment




zws-15/CE/QS

scale drawing

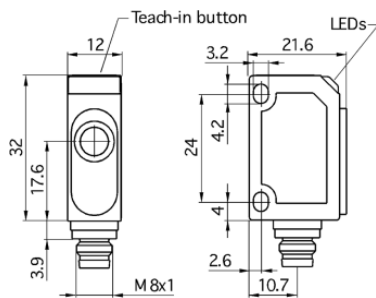

detection zone

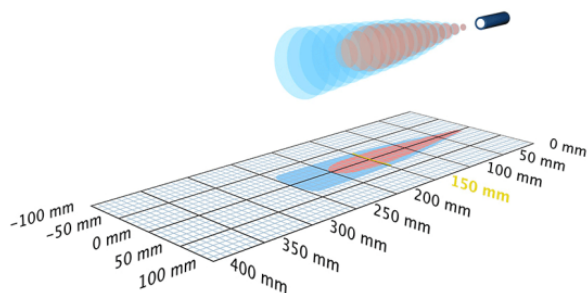

1 x npn



250 mm


design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	150 mm
max. range	250 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

zws-24/CE/QS


scale drawing

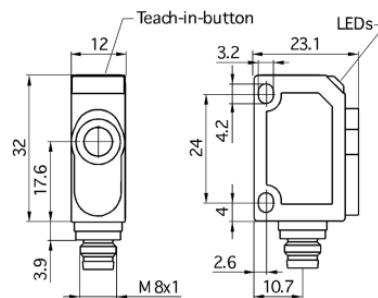

detection zone

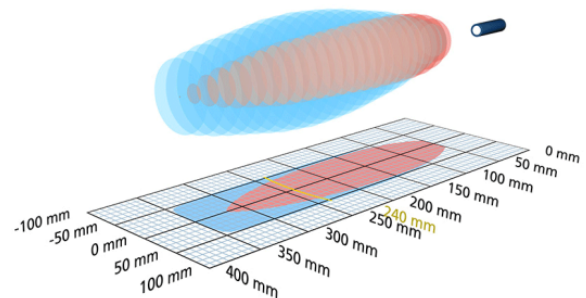

1 x npn



350 mm

design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	500 kHz
blind zone	50 mm
operating range	240 mm
max. range	350 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 25\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output npn: $I_{\max} = 200\text{ mA}$ ($-U_B+2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	25 Hz
response delay	24 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 30\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output npn: $I_{\max} = 200\text{ mA}$ ($-U_B+2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	25 Hz
response delay	24 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	10 g


Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	KST4A-2/M8
	KST4A-5/M8
	KST4G-2/M8
	KST4G-5/M8
	MW-ZWS 2
	MW-ZWS 3
	SoundPipe zws1
	SyncBox2


pin assignment



Accessories


deployable accessory	KST4A-2/M8
	KST4A-5/M8
	KST4G-2/M8
	KST4G-5/M8
	MW-ZWS 2
	MW-ZWS 3
	SyncBox2

pin assignment




zws-25/CE/QS

scale drawing

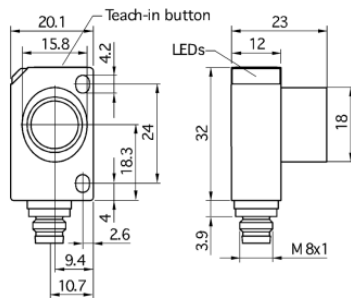

detection zone

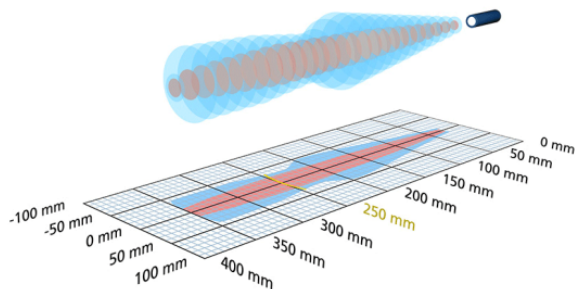

1 x npn



350 mm


design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform schlankes Schallfeld UL Listed

Ultrasonic-Specific


means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
max. range	350 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

zws-35/CE/QS

scale drawing



detection zone

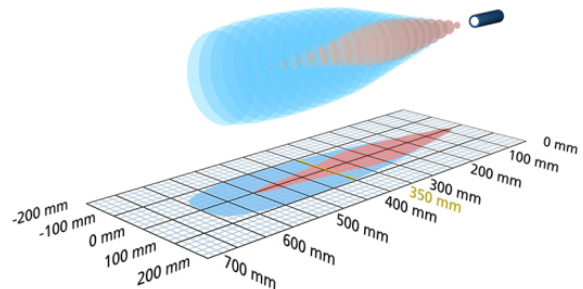

1 x npn



600 mm

design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	64 mm
operating range	350 mm
max. range	600 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 35\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output npn: $I_{\max} = 200\text{ mA}$ ($-U_B+2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	31 Hz
response delay	20 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 25\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output npn: $I_{\max} = 200\text{ mA}$ ($-U_B+2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	15 Hz
response delay	48 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g


Technical Features/Characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status


Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

pin assignment




pin assignment




zws-70/CE/QS

scale drawing



detection zone

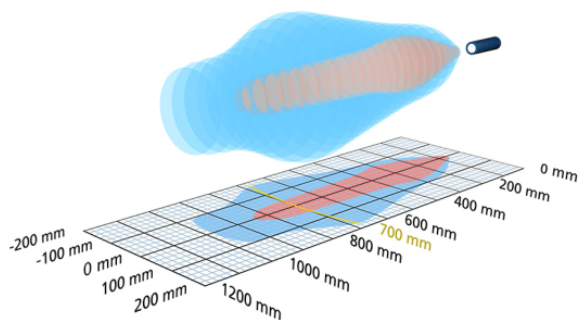

1 x npn

1,000 mm

design	cuboidal
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	kleine quaderförmige Bauform UL Listed

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	300 kHz
blind zone	120 mm
operating range	700 mm
max. range	1,000 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10\%$
no-load current consumption	$\leq 30\text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	switching output npn: $I_{\max} = 200\text{ mA}$ ($-U_B + 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	11 Hz
response delay	36 ms
delay prior to availability	< 300 ms

Inputs

input 1	synchronisation input
---------	-----------------------

housing

material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	11 g

Technical Features/Characteristics

temperature compensation	no
controls	1 push-button
scope for settings	Teach-in via push-button
synchronization	yes
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status

Accessories

deployable accessory	KST4A-2/M8 KST4A-5/M8 KST4G-2/M8 KST4G-5/M8 MW-ZWS 1 SyncBox2
----------------------	--

pin assignment

