


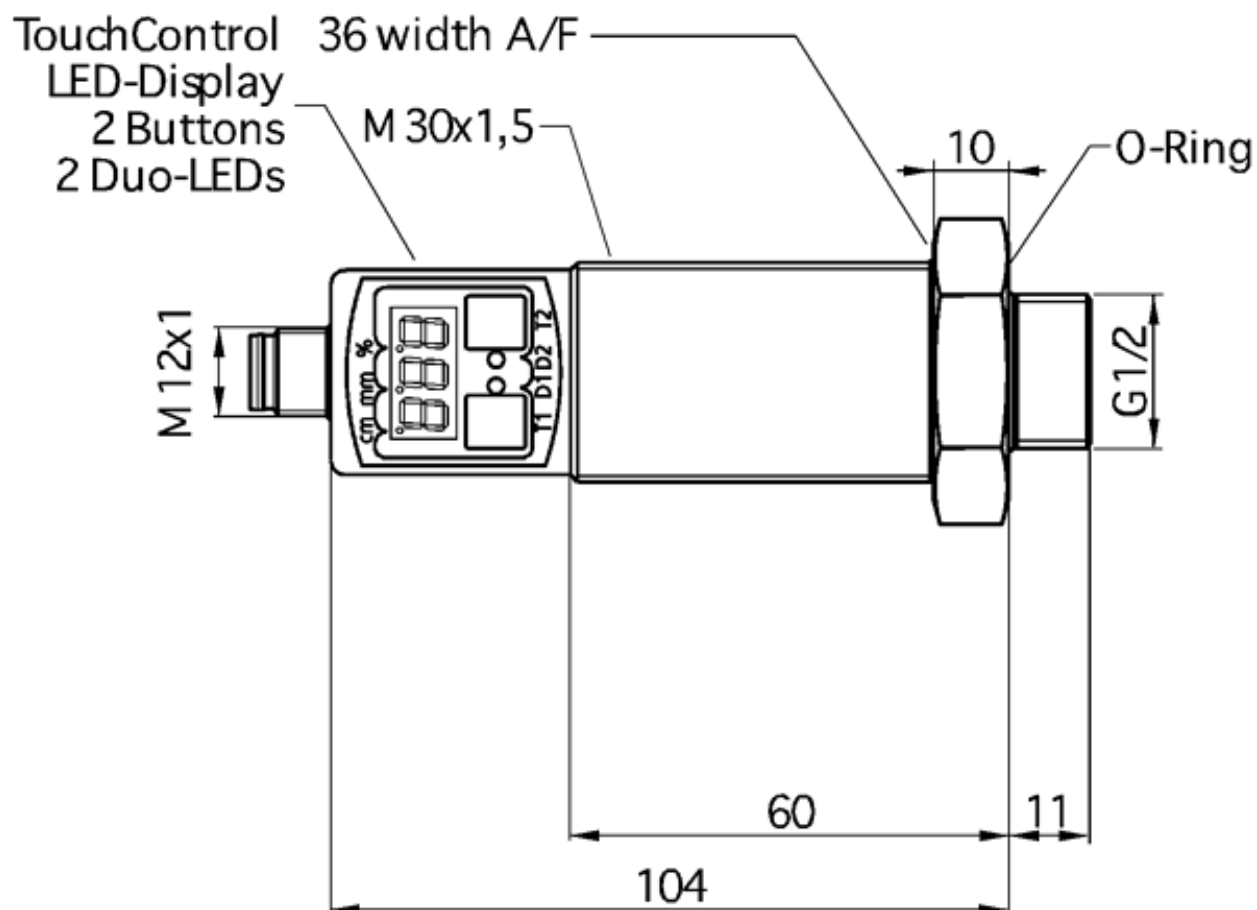

extract from our online catalogue:

hps-25/DIU/TC/E/G1_2

current to: 2026-09-03

hps-25/DIU/TC/E/G1_2**scale drawing**

Successor model available

hps+25/DIU/TC/E/G1



1 x pnp + 1 x analogue 4-20 mA / 0-10 V

design

cylindrical M30

operating mode

proximity switch/reflective mode

particularities

pressure-resistant
 stainless steel version
 display
 process connection G1/2

Ultrasonic-Specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	600 mm (ab 1 bar Überdruck)
max. range	700 mm
resolution	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V, short-circuit-proof switchable rising/falling
Ausgang 2	switching output pnp: $I_{\max} = 200 \text{ mA}$ ($U_B - 2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	3 Hz
response delay	180 ms
delay prior to availability	< 300 ms

Inputs

input 1	com input synchronisation input
---------	------------------------------------

housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	180 g
further versions	hps-25/TF/DIU/TC/E/ G1_2
further versions	high chemical resistance

Technical Features/Characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED

Accessories

deployable accessory	KST5A-2/M12 KST5A-5/M12 KST5G-2/M12 KST5G-5/M12
----------------------	--

pin assignment

