



Estratto dal nostro catalogo online:

esf+1/CFF/Exp

Aggiornato al: 2026-09-03



esf+1 ultrasonic label sensor

The esf+1 ultrasonic label sensor reliably detects transparent, reflective and metallised labels at high web speeds. Designed for installation at the dispensing edge, it enables precise non-contact label detection in labelling applications.

Highlights

- > Slim lower leg > for positioning close to the dispensing edge
- > Flat sensor surfaces > for easy cleaning
- > Measurement cycle time $\geq 150 \mu s$ > for use at high web speeds
- > Robust high-tech plastic housing > with metal-like properties
- > M12 connector can be rotated 90° > for flexible installation
- > Asymmetrical mounting adapter for 2 installation positions > Mounting on the left or right of the dispensing edge
- > Simple Teach-in > label Teach-in with a single button press
- > IO-Link interface > for support of the new industry standard
- > Recipe management via IO-Link > no need to re-teach materials
- > Label and splice sensor as a fork sensor
- > 2 Push-Pull switching outputs > for label detection and web break monitoring
- > 3 LEDs and 1 button on the top of the housing
- > LinkControl > as optional assistance for installation and commissioning

Basics

The ultrasonic label sensor esf+1

can reliably detect high-transparency, reflective and metallised labels without contact, regardless of colour. It can detect materials with grammages ranging from 20 g/m² to 600 g/m², as well as metal and plastic films up to 0.3 mm thick. For thin labels and backing materials, the esf+1 can work at its maximum speed, with a measurement cycle time of $\geq 150 \mu\text{s}$.

The esf+1 is available in two versions:

- The **Pro version** detects all standard labels at the highest switching frequency of 500 kHz.
- The **Expert version** (Exp) with 200 kHz is the specialist for labels that are difficult to detect.

The Pro and Expert versions are identical in design. They can be easily exchanged with each other.

Recommendation: With a measurement cycle time of 150 μs , the Pro version is the faster option and should always be the first choice for label recognition. If labels are not recognised using the Pro version, the Expert version should be used.

Mounting close to the dispensing edge

The very flat design of the lower fork leg allows the material to be positioned close to the dispensing edge.




Label sensor for installation close to the dispensing edge

Easy to clean

The flat sensor surfaces on the transmitter and receiver mean that it has no pinholes or hard-to-reach niches or hollows where dirt can accumulate.

M12 connector can be pivoted by 90°

In this way, the connection line can be led to the sensor from behind or, to save space, from above.

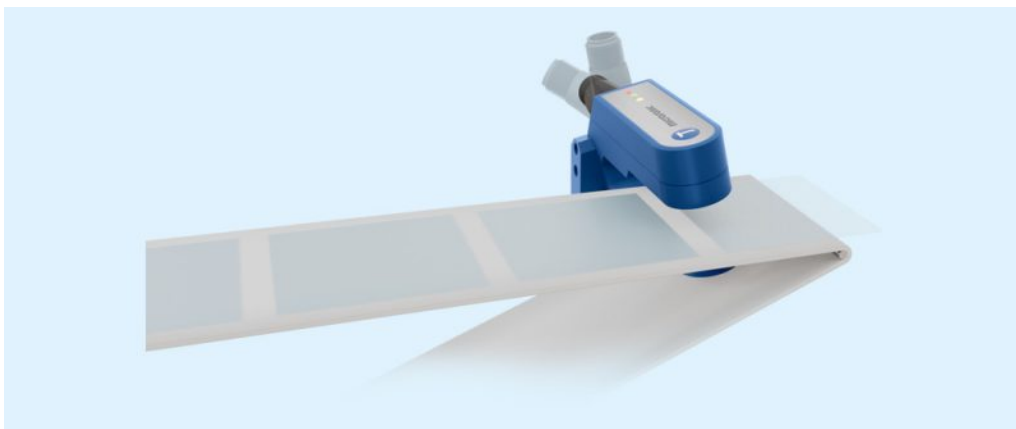

Etikettensensor mit schwenkbarem M12-Stecker

Mounting adapter for two fitting positions

The asymmetrical mounting adapter can be inserted in 2 directions, thereby allowing it to be positioned optimally to the right and left of the dispensing edge.




Precise detection of labels and splices

How ultrasonic label detection works

Labels are guided through the fork. An ultrasonic transmitter in the lower leg of the fork beams a fast sequence of pulses through the backing material (liner material/carrier web). The sound pulses cause the backing material to vibrate such that a greatly attenuated sound wave is beamed from the opposite side. The receiver in the upper leg of the fork receives this sound wave.

The liner material transmits a different signal level from the label. This signal difference is evaluated by the esf+1. The signal difference between the liner material and the label can be very slight. To ensure a reliable distinction, the esf+1 has to learn the label and backing material.

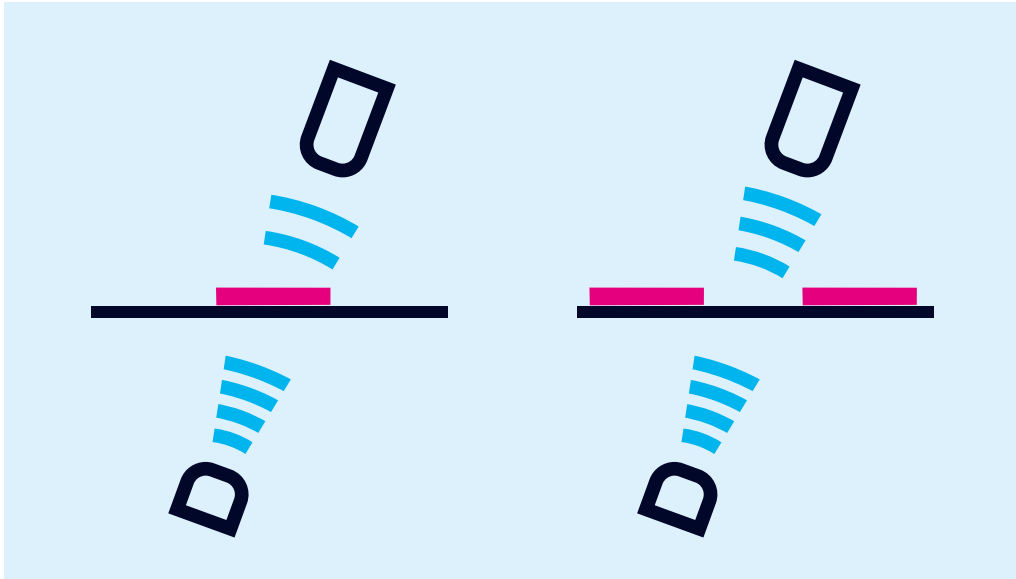

Functional principle of the label sensor: Backing material with a label provides an attenuated signal level

Applications of the esf+1


- Packaging machines
- Print & apply systems
- Converting machines
- Labelling systems
- Use with highly transparent, reflective and metallised labels
- Seam detection on paper, plastic or metal webs
- Web break monitoring
- Label counting

Simple Teach-in


The label material can be taught-in very easily with the aid of the button.

1) Dynamic Teach-in of labels

During the Teach-in process, the carrier web and its labels are guided through the fork at a constant speed. The esf+1 sensor automatically learns the signal level for the labels and for the gaps between the labels. This is the standard Teach-in for labels.

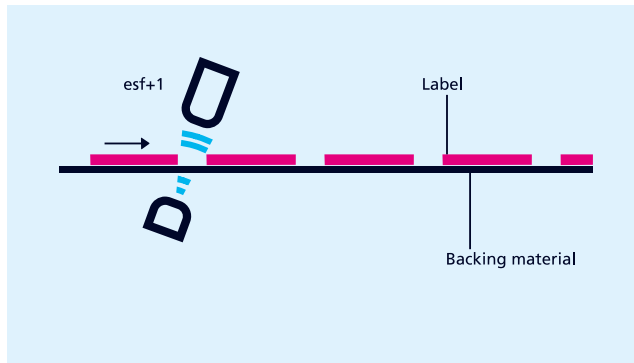

esf+1 for non-contact label detection

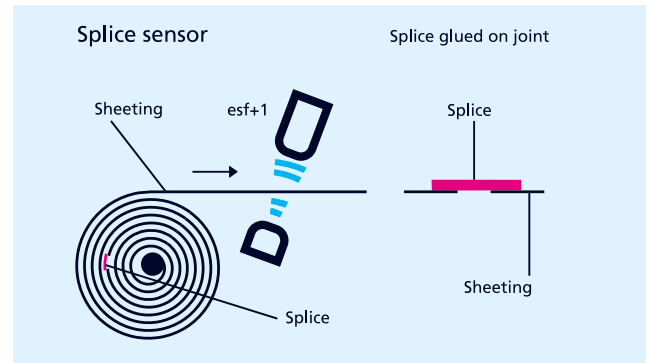

esf+1 for non-contact splice detection

2) Teach-in for splice detection

Web material is generally processed from a roll. The splice to be detected is hidden somewhere in the roll. There is a separate Teach-in method available for this purpose, in which only the sheeting is learned. The esf+1 detects the level difference at the splice and sets its output.

The Teach-in procedure

can optionally be carried out with the button on the top of the housing or with pin 5 on the unit's connector.

With LinkControl

the esf+1 can optionally be parameterised. Measured values can also be shown graphically.

IO-Link and recipe management for fast product changes

esf+1 ultrasonic label and splice sensors have a Push-Pull switching output and support IO-Link in version 1.1.5.

The sensor features an integrated recipe management via IO-Link. Up to 20 different labels with backing material can be learned, and the material parameters can be saved directly in the sensor. In addition, material parameters for splice detection can also be saved in the recipe management, ensuring that material transitions are detected and processed.

All saved settings can be accessed at any time. The integrated recipe management reduces setup times and minimises machine downtime during product changes. There is no need to Teach-in the materials again.

Reliable label detection at high web speeds

The esf+1 ultrasonic label sensor reliably detects highly transparent, reflective and metallised labels without contact, regardless of colour. With a measurement cycle time of just 150 µs, the sensor is suitable for highly dynamic labelling processes and short label spacing. The flat design allows for mounting directly on the dispensing edge, whilst IO-Link and integrated recipe management support quick product changes without the need for re-teaching.

Hai esigenze speciali?

Niente di così semplice.

Con noi potete trovare facilmente una soluzione personalizzata.

Parliamo della vostra applicazione: +49 231 97 51 51-82.

esf+1/CFF/Exp



2 x Push-Pull

Struttura	a forza
Modo operativo	IO-Link label/splice detection
Caratteristiche speciali	Flat fork leg Mounting adapter for 2 mounting positions Swivelling M12 connector IO-Link Recipe management

Specifico d'ultrasuoni

Metodo di misurazione	funzionamento ad impulsi con valutazione dell'ampiezza
Frequenza ultrasonica	200 kHz

Dati elettrici

Tensione d'esercizio U_B	20 V fino a 30 V DC, protetto contro inversioni di polarità
Ondulazione residua	$\pm 10 \%$
Consumo di energia a vuoto	$\leq 50 \text{ mA}$
Tipo di connessione	innesto circolare M12 a 5 poli

Uscite

Uscite 1	uscita de commutazione strappo di pista Push-Pull, $U_B-1 \text{ V}$, $-U_B+1 \text{ V}$, $I_{\max} = 100 \text{ mA}$ chiusura/NC selezionabile, protetto contro i cortocircuiti
Ausgang 2	uscita de commutazione etichetta/impalmatura riconosciuta Push-Pull, $U_B-1 \text{ V}$, $-U_B+1 \text{ V}$, $I_{\max} = 100 \text{ mA}$ chiusura/NC selezionabile, protetto contro i cortocircuiti
Tempo di risposta	$\geq 425 \mu\text{s}$
Ritardo disponibilità	$< 300 \text{ ms}$

Entrate

Entrata 1	ingresso com ingresso teach-in
-----------	-----------------------------------

Custodia

Materiale	PA-GF50
Trasformatore ultrasonico	poliuretano espanso, resine epossidiche con fibre di vetro
Classe di protezione secondo EN 60529	IP 65
Temperatura d'esercizio	$+5^\circ \text{ C}$ fino a $+60^\circ \text{ C}$
Temperatura di immagazzinamento	-40° C fino a $+85^\circ \text{ C}$
Peso	60 g

Dotazione/Caratteristiche speciali

Elementi di regolazione	1 tasto ingresso com
Possibilit� di regolazione	Teach-in via push-button Teach-in via com input on pin 5 LCA-2 with LinkControl IO-Link
Synchronisation	no
Elementi di visualizzazione	1 x LED gr�n: Power, 1 x LED gelb: Output, 1 x LED rot: Error

Accessori

Accessori utilizzabili	KST5A-2/M12 KST5A-5/M12 KST5G-2/M12 KST5G-5/M12 LCA-2 LCA-2 Koffer
------------------------	---

Assegnazione dei pin

