



Product Description
 The lcs+ sensor offers a non-contact measurement of the distance to an object which must be positioned within the sensor's detection zone. The switching outputs are set conditional upon the adjusted detect distances.
 The sensors can be adjusted via Teach-in procedure using two buttons. Two LEDs indicate operation and the states of the switching outputs.
 Optionally all Teach-in and additional sensor parameter settings can be made using the LinkControl adapter (optional accessory) and the LinkControl software for Windows®.

Operating Manual
Ultrasonic sensor
with two switching outputs
 lcs+340/DD
 lcs+600/DD

Note
 The housing was updated with Batch number
 ■ FA2304912 for lcs+340
 ■ FA2304201 for lcs+600.
 The assembly diagram and installation height are identical to the old housing.

Safety Notes
 ■ Read the operating manual prior to start-up.
 ■ Connection, installation and adjustment works should be carried out by expert personnel only.
 ■ No safety component in accordance with the EU Machine Directive, use in the area of personal and machine protection not permitted

Proper Use
 lcs+ ultrasonic sensors are used for non-contact detection of objects.

Installation
 → Mount the sensor at the place of fitting.
 → Connect a connection cable to the M12 device plug, see Fig. 1.

	+U _B	colour brown
	-U _B	blue
	D2	black
	D1	white
	Sync/Com	grey

Fig. 1: Pin assignment with view onto sensor plug and colour coding of the microsonic connection cables

Start-Up
 → Connect the power supply.
 → Set the sensor parameters using the Teach-in procedure, see Diagram 1.

Factory Setting
 ■ Switching outputs on NOC
 ■ Detect distance D1 at operating range and D2 at half operating range

Synchronisation
 If the assembly distance of multiple sensors falls below the values shown in Fig. 2, the internal synchronisation should be used to avoid mutual interference between them. To do this interconnect each pin 5 of the sensors to be synchronised (max. 10 sensors).

lcs+340...	≥2.00 m	≥18.00 m
lcs+600...	≥4.00 m	≥30.00 m

Fig. 2: Minimal assembly distances without synchronisation

Maintenance
 microsonic sensors are maintenance-free. In case of excess caked-on dirt we recommend to clean the white sensor surface.

Notes
 ■ Pin 5 (Sync/Com) of the sensor may only be connected for synchronisation.
 ■ The sensors of the lcs+ family have a blind zone, within which a distance measurement is not possible.
 ■ The lcs+ sensors are equipped with an internal temperature compensation. Due to the sensors self heating, the temperature compensation reaches its optimum working-point after approx. 30 minutes of operation.

■ In the normal operating mode, an illuminated yellow LED signals that the corresponding switching output is set.
 ■ In the »Two-way reflective barrier« operating mode, the object has to be within the range of 0 to 85 % of the set distance.
 ■ If no push-buttons are pressed for 5 minutes during parameter setting mode the made changes are discarded and the sensor returns to normal operating mode.
 ■ In the »Set switching point – method A« Teach-in procedure the actual distance to the object is taught to the sensor as the detect point. If the object moves towards the sensor (e.g. with level control) then the taught distance is the level at which the sensor has to switch the output (see Fig. 3).

Diagram 1: Set sensor parameters via Teach-in procedure








Fig. 3: Teach-in for different directions of movement of the object


Technical data

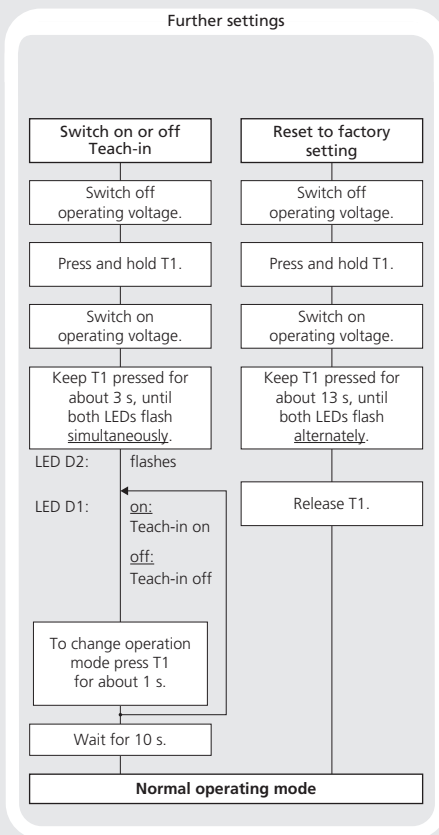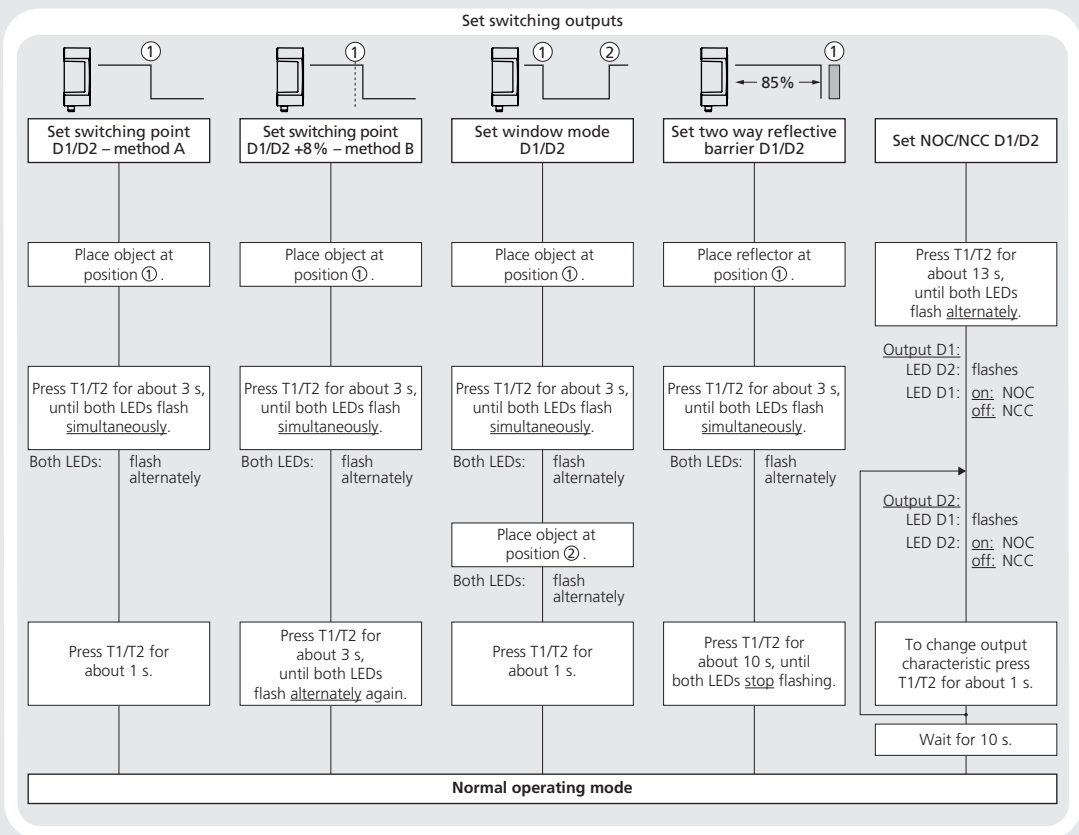

lcs+340...



lcs+600...





blind zone
operating range
maximum range
angle of beam spread
transducer frequency
resolution
reproducibility
detection zones

0 to 350 mm
3,400 mm
5,000 mm
see detection zone
120 kHz
0.18 mm
±0.15 %

0 to 600 mm
6,000 mm
8,000 mm
see detection zone
80 kHz
0.18 mm
±0.15 %

for different objects:
The dark grey areas represent the zone where it is easy to recognise the normal reflector (round bar). This indicates the typical operating range of the sensors. The light grey areas represent the zone where a very large reflector – for instance a plate – can still be recognised. The requirement here is for an optimum alignment to the sensor. It is not possible to evaluate ultrasonic reflections outside this area.

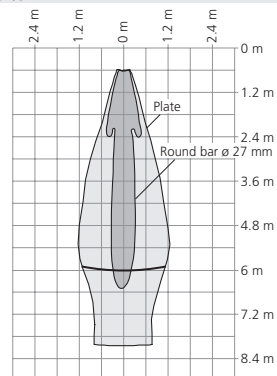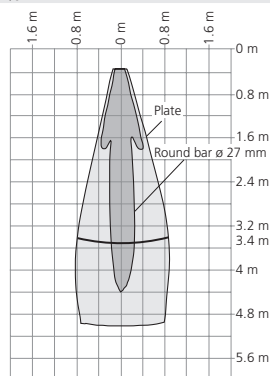

accuracy

±1 % (temperature drift internally compensated; can be deactivated ¹⁾, 0.17 %/K without compensation)

±1 % (temperature drift internally compensated; can be deactivated ¹⁾, 0.17 %/K without compensation)

operating voltage U_B

9 to 30 V DC, reverse polarity protection

9 to 30 V DC, reverse polarity protection

voltage ripple

±10 %

±10 %

no-load current consumption

≤60 mA

≤60 mA

housing

PBT, Polyester; ultrasonic transducer: polyurethane foam, epoxy resin with glass content IP 67

PBT, Polyester; ultrasonic transducer: polyurethane foam, epoxy resin with glass content IP 67

class of protection per EN 60529

5-pin M12 circular plug, PBT

5-pin M12 circular plug, PBT

type of connection

2 push-buttons

2 push-buttons

scope of settings

Teach-in via push-buttons, LCA-2 with LinkControl

Teach-in via push-buttons, LCA-2 with LinkControl

indicators

2 LEDs yellow/green (switching output set/not set)

2 LEDs yellow/green (switching output set/not set)

synchronisation

internal synchronisation up to 10 sensors

internal synchronisation up to 10 sensors

operating temperature

-25 to +70 °C

-25 to +70 °C

storage temperature

-40 to +85 °C

-40 to +85 °C

weight

180 g

240 g

switching hysteresis ¹⁾

50 mm

100 mm

switching frequency ²⁾

4 Hz

3 Hz

response time ²⁾

172 ms

240 ms

time delay before availability

<380 ms

<450 ms

norm conformity

EN 60947-5-2

EN 60947-5-2

order no.

lcs+340/DD

lcs+600/DD

switching outputs

2x pnp, U_B=2 V, I_{max} = 2x 200 mA
NOC/NCC adjustable, short-circuit-proof

2x pnp, U_B=2 V, I_{max} = 2x 200 mA
NOC/NCC adjustable, short-circuit-proof

¹⁾ Can be programmed via LinkControl.

²⁾ With LinkControl the selected filter setting influences the switching frequency and response time.

- If the object to be scanned moves into the detection area from the side, the »Set switching point +8 % – method B« Teach-in procedure should be used. In this way the switching distance is set 8 % further than the actual measured distance to the object. This ensures a reliable switching distance even if the height of the objects varies slightly (see Fig. 3).
- The sensor can be reset to its factory setting (see Diagram 1).



Enclosure Type 1
For use only in industrial machinery NFPA 79 applications.

UL LISTED

The proximity switches shall be used with a Listed (CYJV7) cable/connector assembly rated minimum 32 Vdc, minimum 290 mA, in the final installation.

