


液位控制

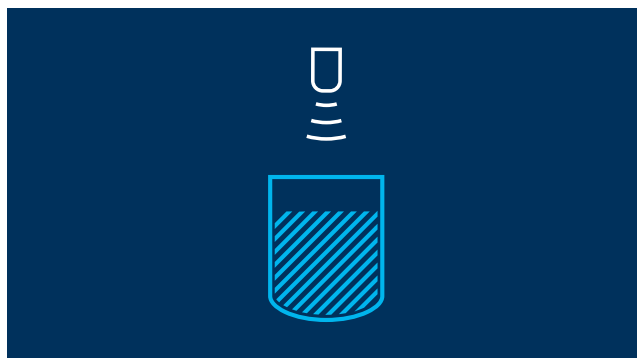

可以检测几个毫米至8米的填充液位，超声波传感器带一个或者两个开关量输出用于高低液位控制，或者是0-10V和4-20mA模拟量输出，另外有耐化学腐蚀的crm+和hps+系列超声波传感器。

应用领域

Printing and Paper

Food and Pharmaceuticals

物流解决方案

Packaging

该应用领域的传感器



mic+

housing: M30 sleeve with digital display

detection ranges: 250 mm, 350 mm, 1,300 mm, 3,400 and 6,000 mm

outputs: 1x Push-Pull, 2x pnp, 4-20 mA and 0-10 V, 1x pnp + analogue



pico+TF

housing: M22 sleeve in PVDF

detection ranges: 250 mm, 350 mm, 600 mm and 1,300 mm

outputs: 1x Push-Pull, 4-20 mA or 0-10 V

special feature: PTFE membrane



crm+

housing: M30 sleeve in stainless steel

detection ranges: 250 mm, 350 mm, 1,300 mm, 3,400 and 6,000 mm

outputs: 1x Push-Pull, 2x pnp, 4-20 mA and 0-10 V

special feature: PEEK membrane



hps+

housing: PVDF or stainless steel housing with PTFE film

detection ranges: 250 mm, 350 mm, 1,300 mm and 3,400

outputs: 2x pnp, 1x pnp + 4-20 mA and 0-10 V

special feature: chemically resistant, pressure-resistant up to 6 bar.



pms

housing: stainless steel housing with PTFE film

detection ranges: 250 mm, 350 mm, 600 mm and 1,300 mm

outputs: 1x Push-Pull, 4-20 mA or 0-10 V

special feature: Washdown Design, EHEDG certified