


6bar压力下的液位控制

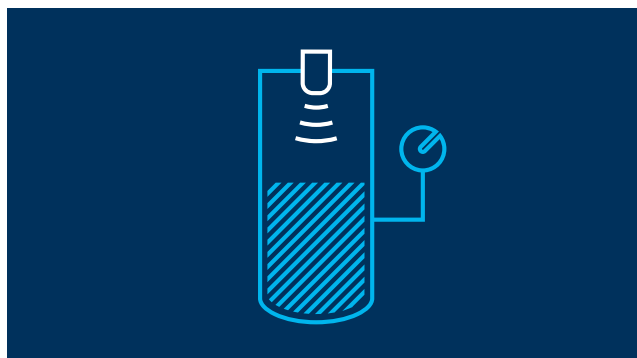

使用hps+ 系列传感器可以进行6bar压力下的液位控制。此外，hps+系列还耐化学腐蚀，有两个pnp开关量输出或者模拟量加开关量输出的型号。

应用领域

Food and Pharmaceuticals

该应用领域的传感器



hps+25/DD/TC/E/G1



hps+35/DIU/TC/E/G1

检测范围: 30 - 990 mm

外壳: 프로세스 연결 G1

输出量: 2 x pnp



hps+130/DD/TC/E/G1

检测范围: 85 - 1.500 mm

外壳: 프로세스 연결 G1

输出量: 1 x pnp + 1 x 아날로그 4-20 mA
/ 0-10 V



hps+130/DIU/TC/E/G1

检测范围: 200 - 5.000 mm

外壳: 프로세스 연결 G1

输出量: 2 x pnp



hps+340/DD/TC/G2

检测范围: 200 - 5.000 mm

外壳: 프로세스 연결 G1

输出量: 1 x pnp + 1 x 아날로그 4-20 mA
/ 0-10 V



hps+340/DIU/TC/E/G2

检测范围: 350 - 8.000 mm
外壳: 프로세스 연결 G2
输出量: 2 x pnp

检测范围: 350 - 8.000 mm
外壳: 프로세스 연결 G2
输出量: 1 x pnp + 1 x 아날로그 4-20 mA
/ 0-10 V