




extract from our online catalogue:

KST3A-2/M8

current to: 2026-09-02

KST3A-2/M8

scale drawing

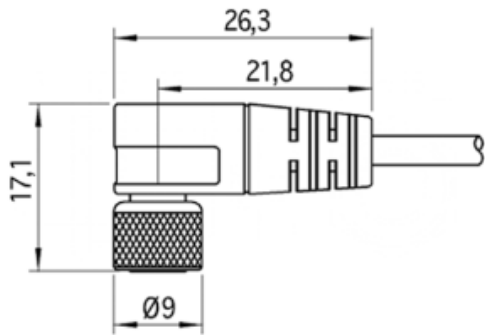

operating mode	accessories
----------------	-------------

housing


class of protection to EN 60529	IP 67
weight	70 g

Accessories

deployable accessory	cable, 3 contacts, female angled connector M8, cable length 2 m
----------------------	---

pin assignment

View on cable box
KST3.../M8 KST4.../M8



- Pole 1: brown
- Pole 2: white
- Pole 3: blue
- Pole 4: black