




extract from our online catalogue:

SyncBox2

current to: 2026-09-02

scale drawing

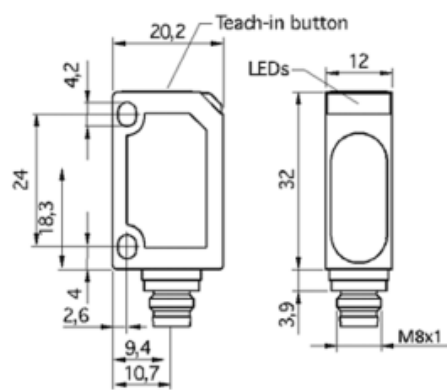

design	cuboidal
operating mode	accessories

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 25 \text{ mA}$
type of connection	4-pin M8 initiator plug

outputs

output 1	synchronisation output npn: $I_{\text{max}} = 200 \text{ mA}$ ($-U_B + 2V$)
----------	--

Inputs

input 1	control input
---------	---------------

housing

material	ABS
class of protection to EN 60529	IP 67
operating temperature	-20°C to $+70^\circ\text{C}$
storage temperature	-40°C to $+85^\circ\text{C}$
weight	10 g

Technical Features/Characteristics

controls	1 push-button
indicators	1 x LED green: working, 1 x LED yellow: reputation rate

