


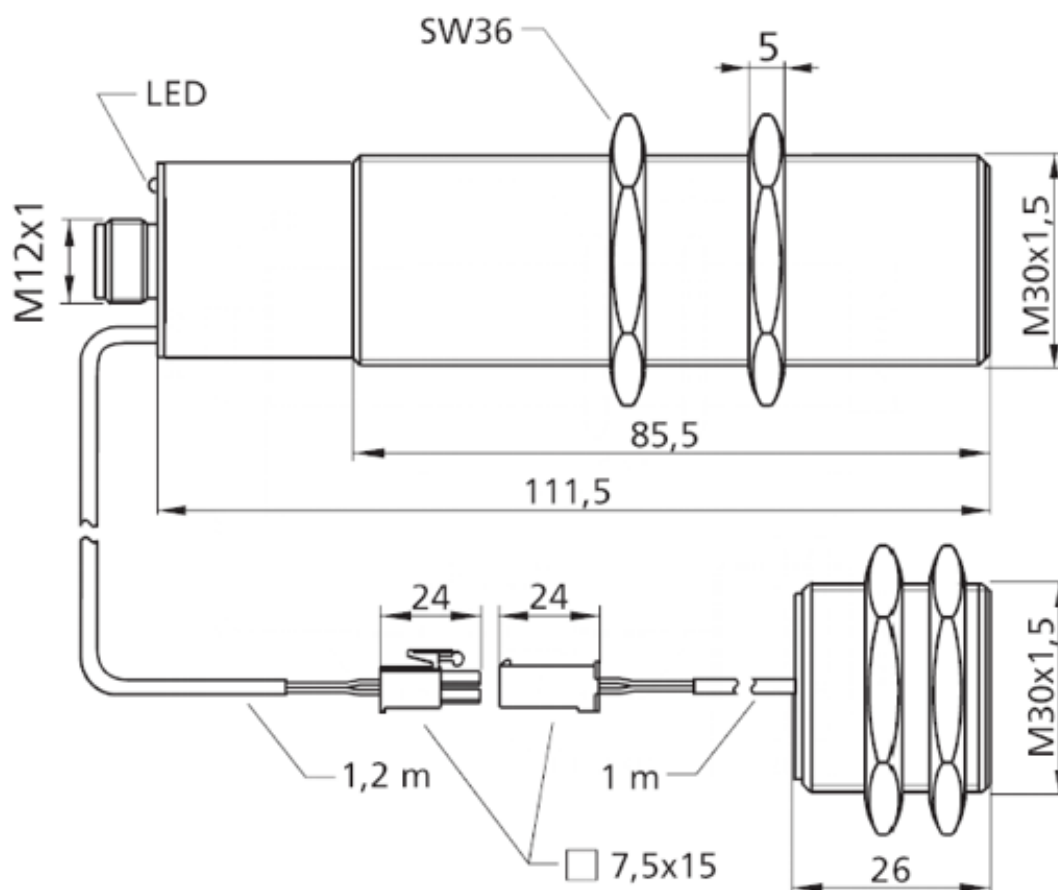

extract from our online catalogue:

dbk-5/BDD/O/M30 E+S

current to: 2026-09-21

dbk-5/BDD/O/M30 E+S**scale drawing**

Successor model available

dbk+5/3CDD/M18 E+S



2 x pnp

design	cylindrical M30
operating mode	double sheet control
working range	papers with weights of 120 g/m ² , metal-laminated sheets, corrugated card, sheet metals up to 2 mm thick, PCB boards

Ultrasonic-Specific

means of measurement	pulse operation with amplitude evaluation
transducer frequency	200 kHz
blind zone	7 mm in front of transmitter and receiver

Electrical Data

operating voltage U_B	20 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
no-load current consumption	$\leq 45 \text{ mA}$
type of connection	5-pin M12 initiator plug

outputs

output 1	double sheet output pnp: $I_{\max} = 500 \text{ mA}$ ($U_B - 2V$) NCC, short-circuit-proof
Ausgang 2	missing sheet output pnp: $I_{\max} = 500 \text{ mA}$ ($U_B - 2V$) NCC, short-circuit-proof
response delay	5.5 ms in trigger mode

Inputs

input 1	control input
---------	---------------

housing

material	brass sleeve, nickel-plated, plastic parts, PBT
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 65
operating temperature	+5°C to +60°C
storage temperature	-40°C to +85°C
weight	250 g
further versions	dbk-5/Sender/M30/K1 dbk-5/Empf/BDD/O/M30
further versions	single transmitter/receiver

Technical Features/Characteristics

controls	not necessary
scope for settings	not necessary
indicators	1 x Duo-LED; green: working / red: double sheet / flashing red: missing sheet

Accessories

deployable accessory	KST5A-2/M12 KST5A-5/M12 KST5G-2/M12 KST5G-5/M12
----------------------	--

pin assignment

