



extract from our online catalogue:

***pico-usc 25/0/CD/S/HV/M18***


current to: 2026-09-21

# pico-usc 25/0/CD/S/HV/M18

## scale drawing



## detection zone

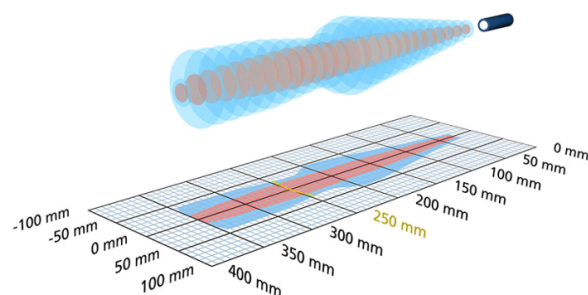

Successor model available

please inquire

 1 x pnp

 350 mm

design

cylindrical M18

operating mode

proximity switch/reflective mode

### Ultrasonic-Specific

means of measurement

echo propagation time measurement

transducer frequency

320 kHz

blind zone

30 mm

operating range

250 mm

max. range

350 mm

resolution

0.36 mm

reproducibility

± 0.15 %

accuracy

temperature drift online compensated, &lt; 1 %

### Electrical Data

operating voltage  $U_B$ 

10 - 30 V d.c., reverse polarity protection

voltage ripple

± 10 %

no-load current consumption

≤ 30 mA

type of connection

4-pin M12 initiator plug

### outputs

output 1

switching output  
 pnp:  $I_{max} = 500 \text{ mA}$  ( $U_B - 2V$ )  
 NOC, short-circuit-proof

switching hysteresis

2.0 mm

switching frequency

25 Hz

response delay

24 ms

delay prior to availability

&lt; 300 ms

### Inputs

|         |                       |
|---------|-----------------------|
| input 1 | synchronisation input |
|---------|-----------------------|

### housing

|                                 |                                                    |
|---------------------------------|----------------------------------------------------|
| material                        | brass sleeve, nickel-plated, plastic parts, PBT    |
| ultrasonic transducer           | polyurethane foam, epoxy resin with glass contents |
| class of protection to EN 60529 | IP 65                                              |
| operating temperature           | -20°C to +70°C                                     |
| storage temperature             | -40°C to +85°C                                     |
| weight                          | 60                                                 |
| further versions                | stainless steel<br>high chemical resistance        |

### Technical Features/Characteristics

|                          |                                         |
|--------------------------|-----------------------------------------|
| temperature compensation | no                                      |
| controls                 | control input                           |
| scope for settings       | durch Referenzmessung gegen Bezugspunkt |
| synchronization          | yes                                     |
| multiplex                | no                                      |
| indicators               | no                                      |

### Accessories

|                      |                                                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------|
| deployable accessory | KST4A-2/M12<br>KST4A-5/M12<br>KST4G-2/M12<br>KST4G-5/M12<br>BF-18<br>UF-90/M18<br>Aufschraubdom M18 |
|----------------------|-----------------------------------------------------------------------------------------------------|

### pin assignment

