



extract from our online catalogue:

***pico-usd 25/4/CD/S/HV/M18E***


current to: 2026-09-22

# pico-usd 25/4/CD/S/HV/M18E

## scale drawing



## detection zone

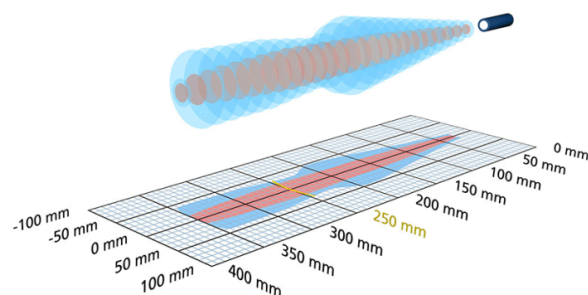

Successor model available

please inquire

1 x pnp

350 mm

design

cylindrical M18

operating mode

window mode

particularities

stainless steel version

## Ultrasonic-Specific

means of measurement

echo propagation time measurement

transducer frequency

320 kHz

blind zone

30 mm

operating range

250 mm

max. range

350 mm

resolution

0.36 mm

reproducibility

± 0.15 %

accuracy

temperature drift online compensated, < 1 %

## Electrical Data

operating voltage  $U_B$

10 - 30 V d.c., reverse polarity protection

voltage ripple

± 10 %

no-load current consumption

≤ 30 mA

type of connection

4-pin M12 initiator plug

## outputs

output 1

switching output  
pnp:  $I_{max} = 500 \text{ mA}$  ( $U_B - 2V$ )  
NOC, short-circuit-proof

switching hysteresis

2.0 mm

switching frequency

25 Hz

response delay

24 ms

delay prior to availability

< 300 ms

## Inputs

|         |                       |
|---------|-----------------------|
| input 1 | synchronisation input |
|---------|-----------------------|

## housing

|                                 |                                                    |
|---------------------------------|----------------------------------------------------|
| material                        | stainless steel, plastic parts, PBT                |
| ultrasonic transducer           | polyurethane foam, epoxy resin with glass contents |
| class of protection to EN 60529 | IP 65                                              |
| operating temperature           | -20°C to +70°C                                     |
| storage temperature             | -40°C to +85°C                                     |
| weight                          | 60 g                                               |

## Technical Features/Characteristics

|                          |                                         |
|--------------------------|-----------------------------------------|
| temperature compensation | no                                      |
| controls                 | control input                           |
| scope for settings       | durch Referenzmessung gegen Bezugspunkt |
| synchronization          | yes                                     |
| multiplex                | no                                      |
| indicators               | no                                      |

## Accessories

|                      |                                                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------|
| deployable accessory | KST4A-2/M12<br>KST4A-5/M12<br>KST4G-2/M12<br>KST4G-5/M12<br>BF-18<br>UF-90/M18<br>Aufschraubdom M18 |
|----------------------|-----------------------------------------------------------------------------------------------------|

## pin assignment

