microsonic



extract from our online catalogue:

# *vnp-130/DIU/TC*

current to: 2026-11-19

microsonic GmbH / Phoenixseestraße 7 / 44263 Dortmund / Germany / **T** +49 231 975151-0 / **F** +49 231 975151-51 / **E** info@microsonic.de
microsonic® ist eine eingetragene Marke der microsonic GmbH. Alle Rechte vorbehalten. Änderungen vorbehalten.

**Archivsensor**

# vnp-130/DIU/TC

## scale drawing




## detection zone

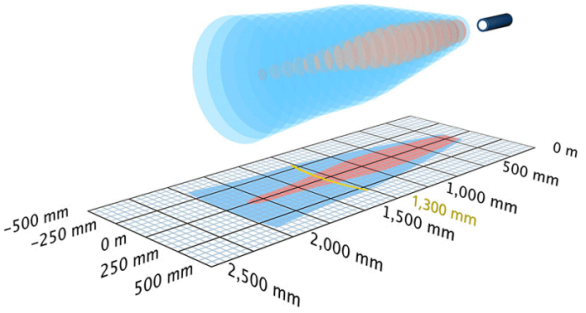


| Successor model available | please inquire |
|---|---|
| 1 x pnp + 1 x analogue 4-20 mA / 0-10 V | 2,000 mm |
| design | cylindrical M30 |
| operating mode | Näherungsschalter/Reflexionstaster<br>Fensterbetrieb<br>analoge Distanzmessung |
| particularities | virtual zero settable<br>display |

## Ultrasonic-Specific

| | |
|---|---|
| means of measurement | echo propagation time measurement |
| transducer frequency | 200 kHz |
| blind zone | 200 mm |
| operating range | 1,300 mm |
| max. range | 2,000 mm |
| resolution | 0.18 mm to 0.57 mm, depending on the analogue window |
| reproducibility | ± 0.15 % |
| accuracy | ± 1 % (temperature drift internally compensated) |

## Electrical Data

| | |
|---|---|
| operating voltage $U_B$ | 9 - 30 V d.c., reverse polarity protection |
| voltage ripple | ± 10 % |
| no-load current consumption | ≤ 80 mA |
| type of connection | 5-pin M12 initiator plug |

## Outputs

| | |
|---|---|
| output 1 | analogue output<br>current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof<br>switchable rising/falling |
| Ausgang 2 | switching output<br>pnp: $I_{max}$ = 200 mA ($U_B$-2V)<br>NOC/NCC adjustable, short-circuit-proof |
| switching hysteresis | 20 mm |
| switching frequency | 6 Hz |
| response delay | 110 ms |
| delay prior to availability | < 300 ms |

## Inputs

| | |
|---|---|
| input 1 | com input<br>synchronisation input<br>teach-in input |

## Housing

| | |
|---|---|
| material | brass sleeve, nickel-plated, plastic parts, PBT, TPU |
| ultrasonic transducer | polyurethane foam, epoxy resin with glass contents |
| class of protection to EN 60529 | IP 67 |
| operating temperature | -25°C to +70°C |
| storage temperature | -40°C to +85°C |
| weight | 110 g |

## Technical Features/Characteristics

| | |
|---|---|
| temperature compensation | yes |
| controls | 2 push-buttons + LED display (TouchControl)<br/>com input |
| scope for settings | Teach-in and numeric configuration via TouchControl<br>LCA-2 with LinkControl |
| synchronization | yes |
| multiplex | yes |
| indicators | 3-digit LED display, 2 x three-colour LED |

## Accessories

| | |
|---|---|
| deployable accessory | KST5A-2/M12<br>KST5A-5/M12<br>KST5G-2/M12<br>KST5G-5/M12<br>BF-30<br>UF-90/M30<br>LCA-2 |

## *pin assignment*

