
圧力下での充填コントロール

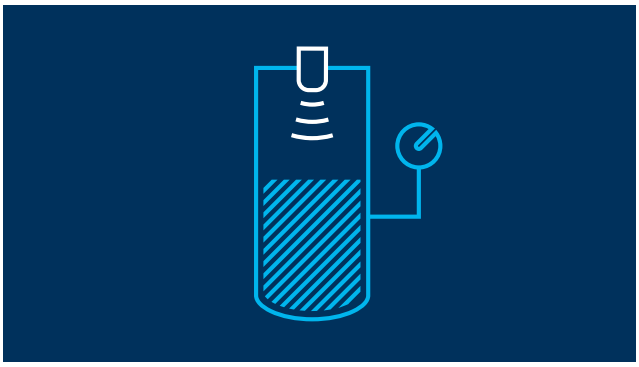


The hps+ ultrasonic sensors enable non-contact level measurement of liquids or bulk materials in tanks, even at overpressures of up to 6 bar. These pressure-resistant sensors measure levels ranging from a few millimetres up to 8 metres (depending on the pressure) and are therefore suitable for industrial processes in the chemical, pharmaceutical and food industries.

hps+ level sensors are available with two switching outputs for minimum/maximum control or with an analogue output (4–20 mA and 0–10 V) for continuous level monitoring. The housing, made of stainless steel or PVDF with a PTFE diaphragm, is designed for chemically aggressive media and offers high corrosion resistance.


アプリケーション領域

Food and Pharmaceuticals


このアプリケーション領域のセンサー




hps+25/DD/TC/E/G1
動作範囲: 30 - 990 mm
ハウジング: ディスプレイ
出力: 2 x pnp




hps+35/DIU/TC/E/G1
動作範囲: 85 - 1.500 mm
ハウジング: ディスプレイ
出力: 1 x pnp + 1 x アナログ 4-20 mA / 0-10 V




hps+130/DD/TC/E/G1
動作範囲: 200 - 5.000 mm
ハウジング: ディスプレイ
出力: 2 x pnp



hps+130/DIU/TC/E/G1
動作範囲: 200 - 5.000 mm
ハウジング: ディスプレイ
出力: 1 x pnp + 1 x アナログ 4-20 mA / 0-10 V



hps+340/DD/TC/G2
動作範囲: 350 - 8.000 mm
ハウジング: ディスプレイ
出力: 2 x pnp



hps+340/DIU/TC/E/G2
動作範囲: 350 - 8.000 mm
ハウジング: ディスプレイ
出力: 1 x pnp + 1 x アナログ 4-20 mA / 0-10 V