


Wire break detection

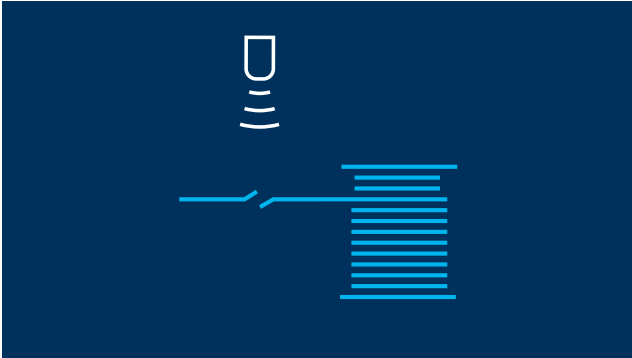

Wire break detection during the winding/unwinding of wires. Depending on the size of the drum, a mic+130/F/TC with 1,300 mm operating range or a mic+35/F/TC with 350 mm operating range can be used.

If the position of the wire on the drum should be recorded, there are ultrasonic sensors with analogue output available.

응용 분야

Packaging

Logistics

More

이 응용 분야용 센서



mic+130/F/TC



mic+35/F/TC

동작 범위: 200 - 2.000 mm
하우징: 圆柱形 M30
출력: 1 x Push-Pull



mic+130/IU/TC

동작 범위: 65 - 600 mm
하우징: 圆柱形 M30
출력: 1 x Push-Pull



mic+35/IU/TC

동작 범위: 200 - 2.000 mm
하우징: 圆柱形 M30
출력: 1 x 4-20 mA + 0-10 V 模拟量输出

동작 범위: 65 - 600 mm
하우징: 圆柱形 M30
출력: 1 x 4-20 mA + 0-10 V 模拟量输出