




extract from our online catalogue:

lpc-25/CEE/HV/M18


current to: 2026-09-21

Ipc-25/CEE/HV/M18

scale drawing



detection zone

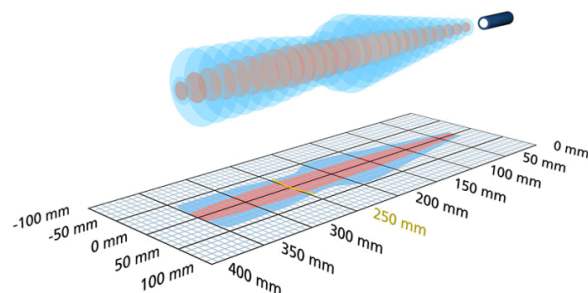

Successor model available

Ipc-25/CEE/M18



2 x npn

350 mm

design

cylindrical M18

operating mode

 proximity switch/reflective mode
 reflective barrier
 window mode

particularities

archive sensor

Ultrasonic-Specific

means of measurement

echo propagation time measurement

transducer frequency

320 kHz

blind zone

30 mm

operating range

250 mm

max. range

350 mm

resolution

0.08 mm

reproducibility

± 0.15 %

accuracy

± 1 % (temperature drift internally compensated)

Electrical Data

operating voltage U_B

10 - 30 V d.c., reverse polarity protection

voltage ripple

± 10 %

no-load current consumption

≤ 40 mA

type of connection

5-pin M12 initiator plug

outputs

output 1	switching output npn: $I_{\max} = 500 \text{ mA}$ ($-U_B+2V$) NOC/NCC adjustable, short-circuit-proof
Ausgang 2	switching output npn: $I_{\max} = 500 \text{ mA}$ ($-U_B+2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	2.0 mm
switching frequency	25 Hz
response delay	24 ms
delay prior to availability	< 300 ms

Inputs

input 1	com input teach-in input
---------	-----------------------------

housing

material	brass sleeve, nickel-plated, plastic parts, PBT
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	43 g
further versions	stainless steel

Technical Features/Characteristics

temperature compensation	yes
controls	com input
scope for settings	Teach-in via com input on pin 5 LCA-2 with LinkControl
synchronization	yes
multiplex	no
indicators	2 x LED yellow: switch status

Accessories

deployable accessory	KST5A-2/M12 KST5A-5/M12 KST5G-2/M12 KST5G-5/M12
----------------------	--

pin assignment

